


LTR	REVISION	DATE	APPD
B	100224-PP01: UPDATED MOL FROM 1.10 MAX TO 1.12 TYPICAL 021624-GZ01: REMOVED RoHS COMPLIANT LOGO	10-03-24	HF

BF3126-SIW-024B

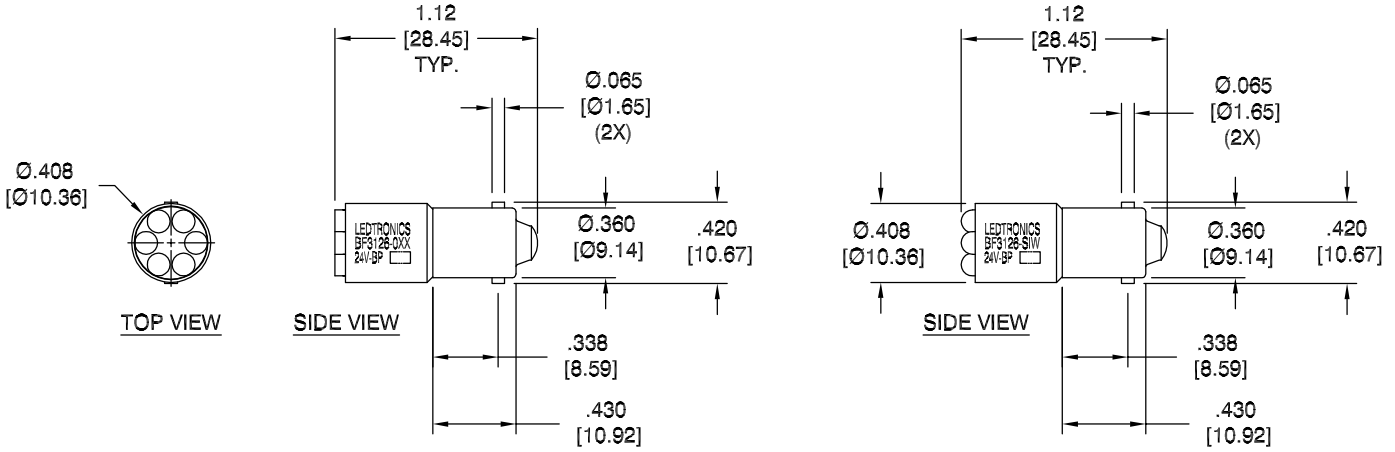

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
2. SLEEVE MATERIAL: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)
3. BASE MATERIAL: (BODY) BRASS & NICKEL-PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF3126-OAG-024B	AQUA GREEN	24Vdc	0.50 W	0.021 A	9.450cd	520	-	105°
BF3126-OCW-024B	COOL WHITE	24Vdc	0.41 W	0.017 A	12.240cd	-	8000K	105°
BF3126-OPB-024B	SUPER BLUE	24Vdc	0.43 W	0.018 A	1.890cd	465	-	110°
BF3126-SIW-024B	WARM WHITE	24Vdc	0.36 W	0.015 A	11.250cd	-	3000K	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

 LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		TITLE BF3126-XXX-024B							
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32	DWG NO BF3126-24V-BP	SCALE 1:1	SHEET 1 OF 1	DATE 02-11-15	CODE IDENT NO. 8Z410	DWG BY GP 02-11-15	CHK BY QA RR 10-04-24	MFG PP 10-04-24	R&D UF 10-04-24