


LTR	REVISION	DATE	APPD
-	RELEASED	04-15-16	

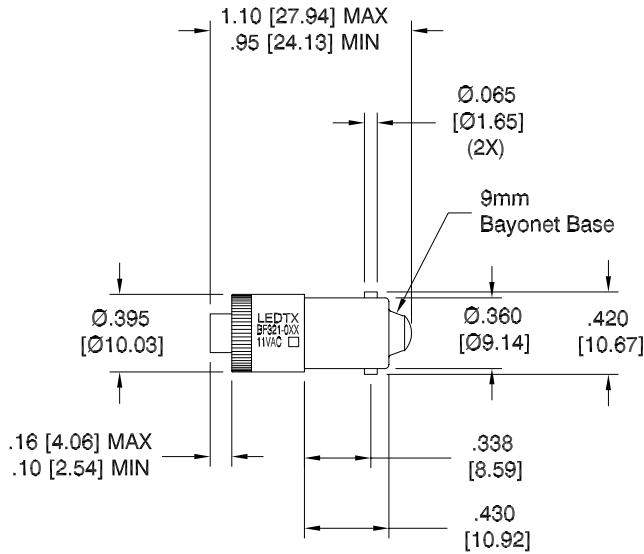

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY



REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF321-0AG-011A	AQUA GREEN	11VAC	0.09 W	0.026 A	0.400cd	520	-	85°	AC Voltage
BF321-0CW-011A	COOL WHITE	11VAC	0.10 W	0.027 A	0.825cd	-	8000K	95°	AC Voltage
BF321-0ER-011A	SUPER RED	11VAC	-	0.025 A	-	630	-	90°	AC Voltage
BF321-0PB-011A	SUPER BLUE	11VAC	-	0.022 A	-	465	-	85°	AC Voltage
BF321-0UR-011A	ULTRA RED	11VAC	0.08 W	0.023 A	0.115cd	652	-	80°	AC Voltage
BF321-0UY-011A	SUPER YELLOW	11VAC	0.10 W	0.027 A	0.116cd	593	-	85°	AC Voltage
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE					
BF321-0XX-011A					
DWG NO	SCALE	SHEET	DATE		
BF321-11VAC	1:1	1 OF 1	04-15-16		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP		JH	LD	LUV
	04-15-16		06-01-16	06-01-16	05-31-16