


LTR	REVISION	DATE	APPD
C	051718-GP01: UPDATED TEST DATA	06-14-18	GP

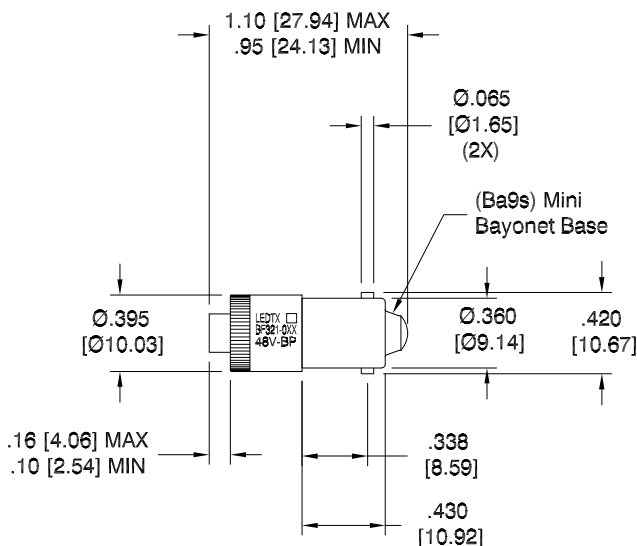

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: (BODY) BRASS & NICKEL PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER _____
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF321-0AG-048B	AQUA GREEN	48Vdc	0.58 W	0.012 A	1.320cd	520	-	85°	BipolarDC(+/-)
BF321-0CW-048B	COOL WHITE	48Vdc	0.67 W	0.014 A	2.327cd	-	8000K	95°	BipolarDC(+/-)
BF321-0ER-048B	SUPER RED	48Vdc	0.58 W	0.012 A	0.180cd	630	-	90°	BipolarDC(+/-)
BF321-0IW-048B	WARM WHITE	48Vdc	0.72 W	0.015 A	1.350cd	-	3000K	110°	BipolarDC(+/-)
BF321-0PB-048B	SUPER BLUE	48Vdc	0.72 W	0.015 A	0.525cd	465	-	85°	BipolarDC(+/-)
BF321-0UG-048B	SUPER GREEN	48Vdc	0.91 W	0.019 A	0.119cd	573	-	90°	BipolarDC(+/-)
BF321-0UO-048B	SUPER ORANGE	48Vdc	0.58 W	0.012 A	0.180cd	610	-	95°	BipolarDC(+/-)
BF321-0UR-048B	ULTRA RED	48Vdc	0.58 W	0.012 A	0.090cd	652	-	80°	BipolarDC(+/-)
BF321-0UY-048B	SUPER YELLOW	48Vdc	0.72 W	0.015 A	0.750cd	593	-	85°	BipolarDC(+/-)

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY
---------------------	---------------	------------------	-----------	-------------	-----------------	-------	----------------------	-----------------	-------------------------

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p> <p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°.30' FRACT. ± 1/32</p>	<p>TITLE BF321-0XX-048B</p>					
		DWG NO	SCALE	SHEET	DATE		
		BF321-48V-BP	1:1	1 OF 1	03-05-14		
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS		
8Z410	03-05-14		06-21-18	06-21-18	06-21-18		