


LTR	REVISION	DATE	APPD
A	041516-GP01: ADDED MISSING DATA	04-19-16	GP

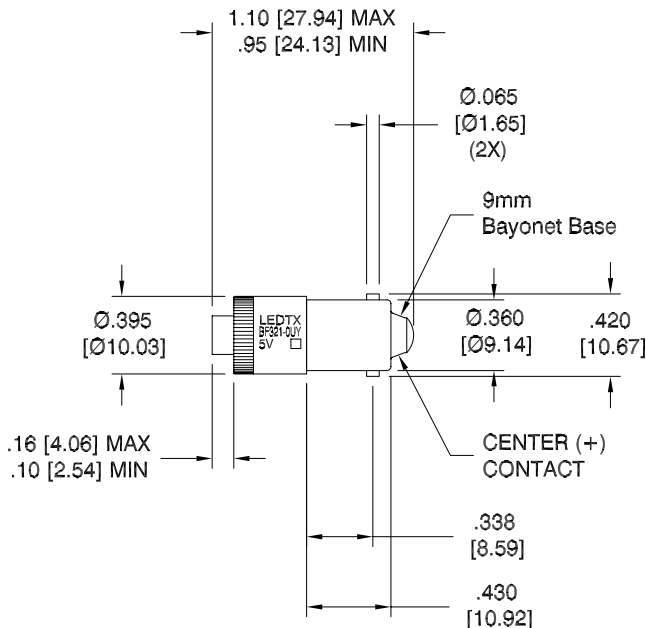

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY



ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

BF321-0UY-005P	SUPER YELLOW	5Vdc	-	0.020 A	-	593	85°	Positive(+)
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE**	CENTER CONTACT POLARITY



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE							
BF321-0UY-005P							
DWG NO		SCALE		SHEET		DATE	
BF321-5V-P		1:1		1 OF 1		09-20-10	
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D		
8Z410	GP 09-20-10		EE 06-06-16	LD 06-06-16	LUV 06-03-16		