


LTR	REVISION	DATE	APPD
A	041516-GP01: ADDED MISSING DATA	04-19-16	GP

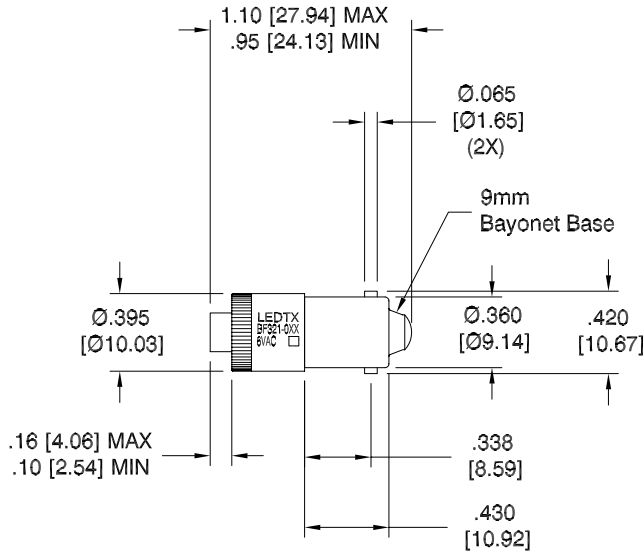

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY



REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF321-0AG-006A	AQUA GREEN	6VAC	-	0.015 A	-	520	-	85°	AC Voltage
BF321-0CW-006A	COOL WHITE	6VAC	-	0.015 A	-	-	8000K	95°	AC Voltage
BF321-0UR-006A	ULTRA RED	6VAC	-	0.020 A	-	652	-	80°	AC Voltage
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY



-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE					
BF321-0XX-006A					
DWG NO		SCALE	SHEET	DATE	
BF321-6VAC		1:1	1 OF 1	10-17-11	
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	MM		EE	LD	LUV
	10-17-11		06-06-16	06-06-16	06-03-16