STARLED® INC.

BI-PIN INDICATOR LIGHT CARTRIDGE (MOUNTING HOLE DIA. 0.290")

ORDERING INFORMATION: BPC14 (A) 1 (B) F (C) C (D) 1 (E) - 24V/25 (F) - B (G)

(A) MODEL & LENGTH
BPC14 – L = 1.140" MAX. M.O.L.
BPCL14 – L = 1.328" MAX. M.O.L.

(B) NUMBER OF LED CHIPS
1 = 1, T1-3/4 SINGLE CHIP LED
6 = 1, T1-3/4 6 CHIP LED

(C) LENS CAP TYPE
F = FLUTED
P = PLAIN



MODEL: BPC14

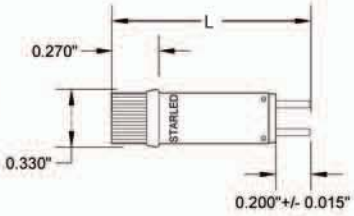

(D) LENS CAP COLOR
C = CLEAR TINTED
WC = WATER CLEAR
WD = WHITE DIFFUSE

(E) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm)
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
U4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm) (Single chip LED only)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE) (Single chip LED only)
*10NW = ULTRA BLUE (465-475nm) (Single chip LED only)
*11NW = BLUISH GREEN (498-508nm) (Single chip LED only)
*12NW = SOFT WHITE (NO nm VALUE)
***Max continuous current 10mA.**
***NOT AVAILABLE IN 6 CHIP LED.**



MODEL: BPCL14



(F) STANDARD OPERATING VOLTAGES /mA.
SINGLE CHIP LED: 5V/25, 12V/25, 24V/25, 28V/25, 48V/12 & 120VAC/6
6 CHIPS LED: 12V/30, 24V/15, 28V/15, 48V/12 & 120VAC/6
For other voltages please call factory.

BOTTOM VIEW

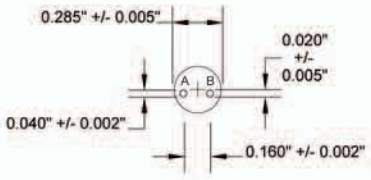

(G) HOUSING COLOR
B = BLACK

Mounting clip sold separately.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE