


LTR	REVISION	DATE	APPD
C	050418-GP01: REMOVED P/N & UPDATED TEST TABLE	05-29-18	GP

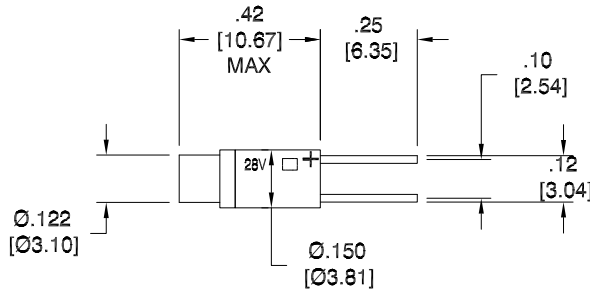

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: EPOXY

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

BPF120-0AG-028V	AQUA GREEN	24/28Vdc(28Vdc)	0.42 W	0.015 A	0.150 cd	"V"= DC only	521	120°
BPF120-0CW-028V	COOL WHITE	24/28Vdc(28Vdc)	0.42 W	0.015 A	0.100 cd	"V"= DC only	8000K	120°
BPF120-0UR-028V	ULTRA RED	24/28Vdc(28Vdc)	0.56 W	0.020 A	0.033 cd	"V"= DC only	651	120°
BPF120-0UY-028V	SUPER YELLOW	24/28Vdc(28Vdc)	0.56 W	0.020 A	0.015 cd	"V"= DC only	590	120°
BPF120-XIW-028V	WARM WHITE	24/28Vdc(28Vdc)	0.19 W	0.006 A	0.950 cd	"V"= DC only	3000K	120°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER W	CURRENT (A)	MAXIMUM CANDELA	CONTACT POLARITY	λP nm COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p>		<p>TITLE BPF120-XXX-028V</p>								
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>		<p>DWG NO BPF120-28V-DC</p>		<p>SCALE 2:1</p>		<p>SHEET 1 OF 1</p>		<p>DATE 07-29-10</p>		
	<p>CODE IDENT NO. 8Z410</p>		<p>DWG BY GP 07-29-10</p>		<p>CHK BY</p>		<p>QA EE 05-30-18</p>		<p>MFG LD 05-30-18</p>		<p>R&D KS 05-30-18</p>