




STARLED[®], INC.

T-10 LED TUBE LIGHTS

ORDERING INFORMATION: $\frac{\text{BPT10SM}}{\text{(A)}} \frac{120}{\text{(B)}} \frac{4}{\text{(C)}} \frac{\text{C}}{\text{(D)}} \frac{\text{CW} - 120-277\text{VAC}}{\text{(E)}} \frac{\text{(F)}}{\text{(F)}}$

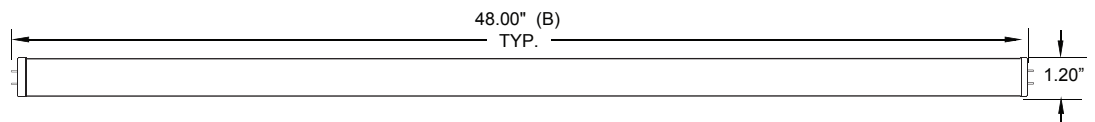

(A) MODEL NUMBER
BPT10SM

(C) NUMBER OF LEDS
120

(B) LENGTH
4'

(D) LENS TYPE
C = CLEAR-FLUTED

(E) LED EMITTED COLOR
CW= COOL WHITE: (5000 ~ 6500K)

(F) STANDARD OPERATING VOLTAGES
120-277VAC MAX. (DO NOT EXCEED 277VAC)

SPECIFICATIONS: TYP. SPECS. @ 120V

EFFICACY LM/WATT: 141

OUTPUT CURRENT mA: 145

POWER CONSUMPTION: 16W

THD: <10%

CRI: >70

INPUT VOLTAGE: 120-277VAC MAX.

POWER FACTOR: ≥ 0.88

INGRESS PROTECTION: IP55


BASE: G13 (BI-PIN)

OPERATING LIFE: 50,000 HRS. TYP.


LUMEN MAINTENANCE: >70% @ 50K HRS.



PATENT: PENDING

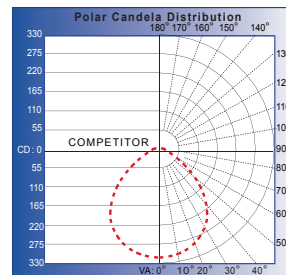


COMPETITOR

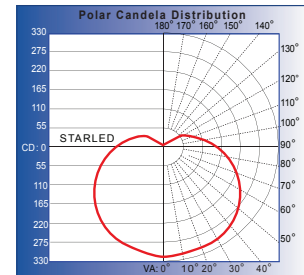


STARLED
(Update Pending)

UNSUPPORTED CONFIGURATIONS

- UNINTERRUPTIBLE POWER SUPPLY (UPS)
- BATTERY BACKUP
- NON DIMMABLE

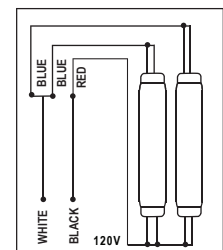

DIRECT WIRING



NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 08-03-16