INCANDESCENT LAMPS

General Service

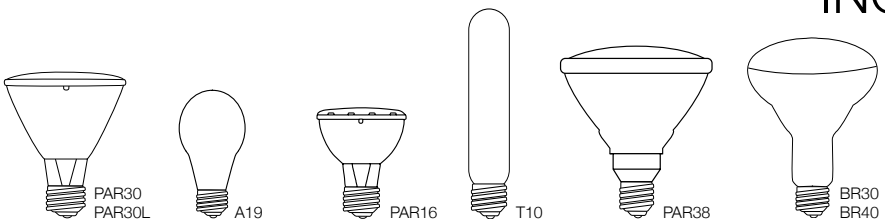

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
60 WATT continued												
A19	**Med.**	6151		**A19RS60**	Rough Service	20/120	130	780	2500	C-9	4.25”	-
		6141		**A19RS60/CS**	CoverShield®	20/120	130	-	2000	C-9	4.25”	-
		6356		**A19YEL60C**	Ceramic Yellow	12/120	130	-	2000	C-9	4.25”	-
PAR16	**Med.**	107616	N,$,18	**HP16NFL60**	Narrow Flood Prism®	15	130	550	3000	CC-8	3.07”	30°
		107850	N,$,18	**HP16NFL60/120**	Narrow Flood Prism®	15	120	550	3000	CC-8	3.07”	30°
		107504	N,$,18	**HP16NSP60**	Narrow Spot Prism®	15	130	550	3000	CC-8	3.07”	10°
T10	**Med.**	9016		**T10CL60**	Clear	25/200	130	420	2500	C-5V	5.00”	-
		9017		**T10FR60**	Frost	25/200	130	420	2500	C-5V	5.00”	-
PAR30	**Med.**	70345	Ⓔ † $,17	**HP30FL60/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	3.62”	30°
PAR30L	**Med.**	70342	Ⓔ † $,17	**HP30FL60L/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	4.75”	36°
		70349	Ⓔ † $,17	**HP30WFL60L/S/HX**	Silver PAR Wide Flood HaloXen®	1/15	120	1090	1500	CC-8	4.75”	50°
		70348	Ⓔ † $,17	**HP30SP60L/S/HX**	Silver PAR Spot HaloXen®	1/15	120	1090	1500	CC-8	4.75”	15°
PAR38	**Med.**	70341	Ⓔ † $,17	**HP38FL60/S/HX**	Siver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	5.31”	30°
65 WATT												
BR30	**Med.**	104070	6	**BR30FL65**	Flood	24	130	580	5000	C-9	5.37”	-
		124070	6	**BR30FL65/120**	Flood	24	120	510	5000	C-9	5.37”	-
		75009	†,19	**BR30FL65/H**	Flood	24	120	750	2500	CC-8	5.37”	-
		103620	6	**BR30FL65/P5**	Flood Prism® Long Life Plus	24	130	480	5000	C-9M	5.37”	-
		103110	6	**BR30FL65/P10**	Flood Prism® Ultra Life®	24	120	420	10000	C-9M	5.37”	-
		103528	N, 6	**BR30FL65/20**	Flood Prism® Ultra Life®	24	120	480	20000	C-9M	5.37”	-
		404014	6	**BR30SP65/5**	Spot	24	130	-	5000	C-9	5.37”	-
		404028	6	**BR30AMB65/5**	Amber Prism®	12/24	130	-	5000	C-9	5.37”	-
		404030	6	**BR30BLU65/5**	Blue Prism®	12/24	130	-	5000	C-9	5.37”	-
		404031	6	**BR30DPNK65/5**	Dawn Pink Prism®	12/24	130	-	5000	C-9	5.37”	-
		404039	6	**BR30GRN65/5**	Green Prism®	12/24	130	-	5000	C-9	5.37”	-
		404046	6	**BR30PNK65/5**	Pink Prism®	12/24	130	-	5000	C-9	5.37”	-
		404049	6	**BR30RED65/5**	Red Prism®	12/24	130	-	5000	C-9	5.37”	-
		404051	6	**BR30FL65/CS**	CoverShield® Prism®	1/24	130	-	5000	C-9	5.37”	-
		404053	6	**BR30YEL65/5**	Yellow Prism®	12/24	130	-	5000	C-9	5.37”	-
BR40	**Med.**	404076	6	**BR40FL65/P5**	Flood Prism® Long Life Plus	24	130	550	5000	C-9M	6.56”	-
		75010	†,19	**BR40FL65/H**	Flood	24	120	750	2500	CC-8	6.56”	-
68 WATT												
A19	**Med.**	288580	11	**A19FR68/10**	Frost Prism® Ultra Life®	20/120	130	630	10000	C-9M	4.25”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.

Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.