
DWG NO. 1000070 SH 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

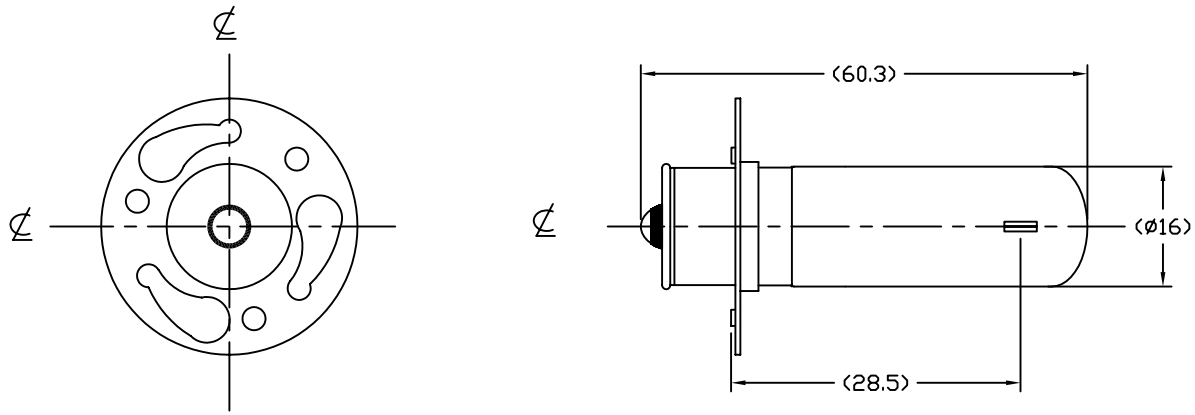

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MANITAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	4 V
CURRENT	0.75 A
BULB FINISH	CLEAR
TOTAL LUMEN	30 Lm
BASE TYPE	P30S
AVERAGE LIFE	50 HRS
FILAMENT TYPE	C-8
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DECIMALS .X ± –
.XX ± –
.XXX ± –
ANGLES ± –
DRILLED HOLES PER AND 10387
REMOVE BURRS AND SHARP EDGES
ALL DIMENSIONS AFTER PLATING

MATERIAL
COMPOSITE

FINISH

CONTRACT NO.

APPROVALS	DATE
DRAWN R.AMPARO	08/09/99
CHKD D.GILCZYNSKI	08/09/99
ENGR	
MFG	
QUAL	
DSGN ACTVY	
GOVT ACTVY	

USHIO AMERICA, INC.
5440 Cerritos Avenue Cypress, CA 90630

TITLE
BRK
INC4V-0.75A

SIZE	CODE IDENT NO.	DWG NO.
B	BRK	1000070

SCALE	WEIGHT	SHEET
NONE		1 OF 1