



4876



4877



650SH



650PH



650SHB



650PHB

Features - Specifications

- Type – Recessed Double Contact
- Rating – 660W, 600V
- Contact assembly silverplated for low contact resistance
- Lamp size T12, T17
- Proper plunger tension for good contact pressure and lamp retention, yet easy to relamp
- Molded, white thermoset urea
- Approved for use with #18 AWG wire (650 Series)
- UL Listed File #E5570 –Guide #OKCT
- CSA Certified File #LR19195 – Guide #240-A-5.14 Class 6231 (650 Series only)


Application

- 4876, 4877 – HO, VHO, or SHO lamps
- 650 Series – RDC, HO, VHO, SHO and PG lamps

RECESSED DOUBLE CONTACT

CATALOG NUMBER	DESCRIPTION
4876	Horizontal stationary end, terminal screws
4877	Horizontal plunger end, terminal screws
650SH	Horizontal stationary, with "U" slot base
650PH	Horizontal plunger, with "U" slot base
650SHB	Horizontal stationary, with slide-on lugs and platform
650PHB	Horizontal plunger, with slide-on lugs and platform

PRODUCT DIMENSIONS – () Indicates mm dimensions

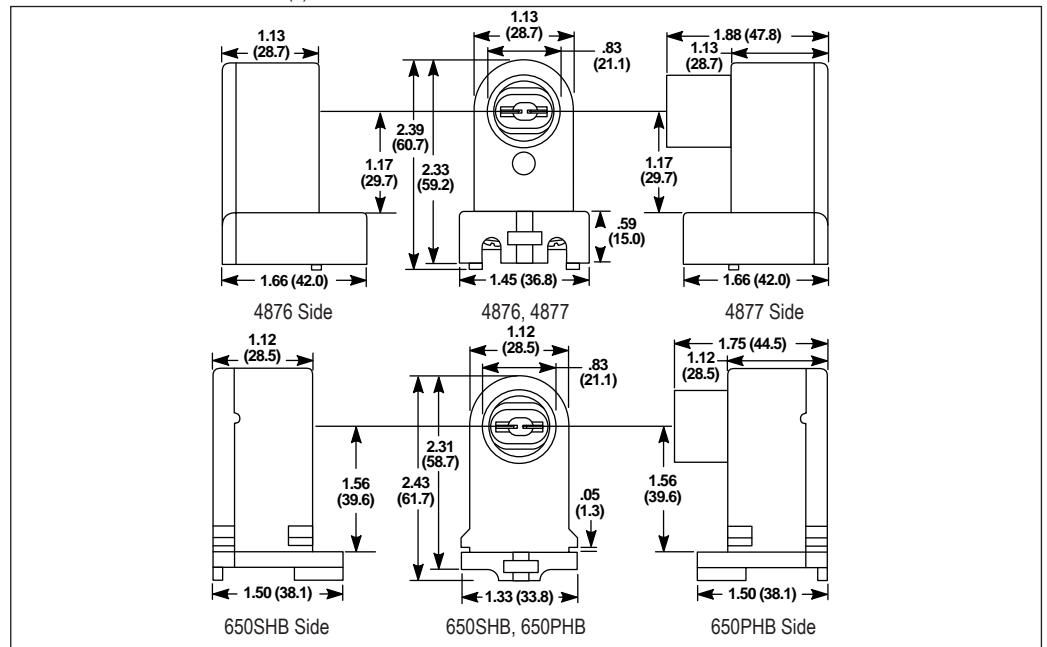

Specifications are subject to change without notice.