


ELDEMA CF SERIES INCANDESCENT C-LITES

Eldema CF Series incandescent C-lites have an unbased lamp packaged inside the cartridge, with connections made to the two pins. The lamps used are the standard T-1-3/4 bulb size or smaller with ratings from 1.35 To 28 volts available. Lens colors in both clear and translucent shades are all standard. The short flat lens style cartridge- CF03, meets MS18235 requirements.

MATE WITH DH LAMPHOLDERS

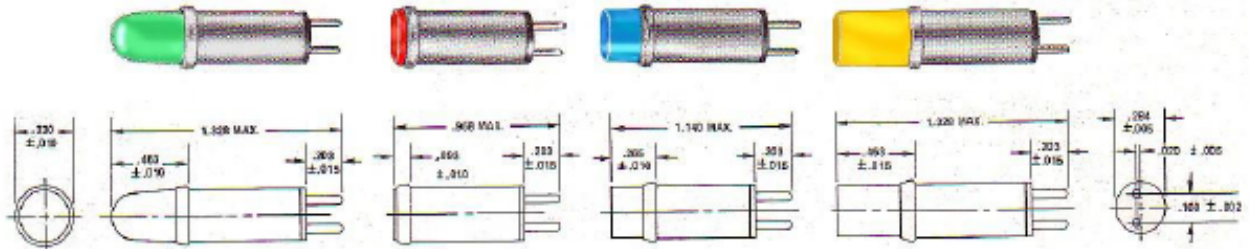

ORDERING INFORMATION

To order Eldema incandescent C - Lites refer to the table at the right and specify Style, Lens Color, Cartridge Finish and Lamp Number.

EXAMPLE PART NUMBER
CF03 - RTS - 2187

CHOICE OF LENS SHAPE & COLOR

The CF03, short flat lens is the style used in most applications. The long flat lens, CF04 and the dome lens, CF01 are used where wide side visibility is important.

The lens colors for CF incandescent C-Lites are usually the translucent shades except for the lower brilliance lamps which should be used with the clear colors. The translucent lens colors give an even, diffused light over the lens surface.

The transparent lens color (WC- water clear) should be used with the lampholders and screw-on D Series lens caps.

LAMP SPECIFICATIONS

The lamp specification shown are the lamps manufacturer's rating and are based on average performance under laboratory conditions. The milli ampere MA ratings are nominal values with 10% tolerance at rated voltage operation.



CF 93 lens style

A fluted lens cap for improved light dispersion on low power lamps and elimination of "hot spots" on high power lamps is available.

Dimensionally same as CF03 above

SERIES CF STYLE	LENS COLOR	FINISH	LAMP						
			NUMBR	VOLTS	MA	LIFE (HRS)			
CF 01 DOME	TRANSLUCENT	Standard S - clear Anodize	1728*	1.35	60	5,000			
			1738*	2.7	60	6,000			
			2158*	3.0	15	10,000			
			680	5.0	60	60,000			
			CF 02 FLUSH	CLEAR	OPTIONAL B - Black Anodize	1730	6.0	40	1,000
						2114	6.0	60	3,000
						1784	6.0	200	1,000
						2180	6.0	40	20,000
						2112	6.3	200	5,000
						2181	6.3	200	20,000
1889*	10.0	14				100,000			
2107*	10.0	40				10,000			
CF03 & CF 93 SHORT FLAT	CLEAR	OPTIONAL B - Black Anodize				2174	12.0	40	10,000
						1705	14.0	80	1,500
			2182	14.0	80	15,000			
			4814*	14.0	17	50,000			
			4818*	18.0	20	20,000			
			2102	18.0	40	10,000			
			1762	28.0	40	4,000			
			2185	28.0	40	20,000			
			2187	28.0	40	7,000			
			CF 04 LONG FLAT	CLEAR	OPTIONAL B - Black Anodize	1728*	1.35	60	5,000
1738*	2.7	60				6,000			
2158*	3.0	15				10,000			
680	5.0	60				60,000			
1730	6.0	40				1,000			
2114	6.0	60				3,000			
1784	6.0	200				1,000			
2180	6.0	40				20,000			
2112	6.3	200				5,000			
2181	6.3	200				20,000			
1889*	10.0	14	100,000						
2107*	10.0	40	10,000						
2174	12.0	40	10,000						
1705	14.0	80	1,500						
2182	14.0	80	15,000						
4814*	14.0	17	50,000						
4818*	18.0	20	20,000						
2102	18.0	40	10,000						
1762	28.0	40	4,000						
2185	28.0	40	20,000						
2187	28.0	40	7,000						

* These Lamps should be used with the clear lens colors only because of their relatively lower light output

STANDARD	BECOMES	FLUTED
CF 03	Becomes	CF 93
CG03	Becomes	CG 93
CR 03	Becomes	CR 93