
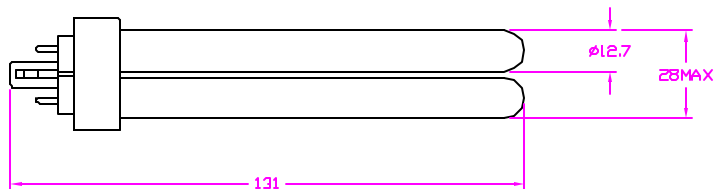


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------



NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	91 V
WATTAGE	13 W
CURRENT	0.175 A
COLOR TEMP	2700 K
CRI	82
LUMENS	800 Lm
ANSI SHAPE	T-4 DOUBLE TUBE
BASE TYPE	CA9 TYPE-C24q-1
Avg. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES DRILLED HOLES PER AND 10347 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO. APPROVALS DRAWN R. AMPARO 03/08/01 CHECKED K. GORDERO 03/08/01 ENG'G QUAL DESIGN ACT'Y MGMT ACT'Y		
MATERIAL COMPOSITE			USHIO AMERICA, INC. 10550 Comdan Dr. Cypress, CA 90630 TITLE UFL-CF13DE/827 COMPACT FLUORESCENT		
FINISH			SIZE	CODE IDENT NO.	DWG NO.
			B		3000159
			SCALE	NONE	WEIGHT
			SHEET 1 OF 1		