

4


3

DWG NO. 3000056 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

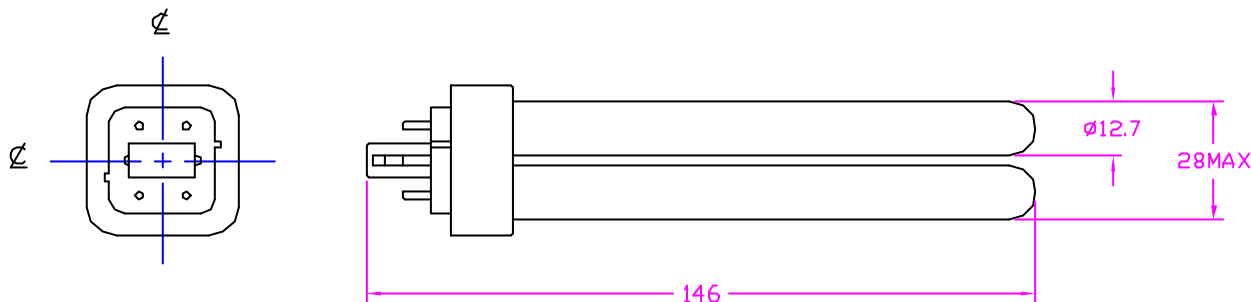

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	100 V
WATTAGE	18 W
CURRENT	0.220 A
COLOR TEMP	2700 K
CRI	B2
LUMENS	1200 Lm
ANSI SHAPE	T-4 DOUBLE TUBE
BASE TYPE	CAP TYPE-G24q-2
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DRAWN	R.AMPARO	03/06/01
			CHKD	K.CORDERO	03/06/01
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
MATERIAL			TITLE		
COMPOSITE			USHIO AMERICA, INC.		
			10550 Camden Dr. Cypress, CA 90630		
			UFL-CF18DE/827		
			COMPACT FLUORESCENT		
			SIZE	CODE IDENT NO.	DWG NO.
			B		3000056
			SCALE	NONE	WEIGHT
					SHEET
					1 OF 1

4

3

2

1

CAD