

4



3

DWG NO. 3000060 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

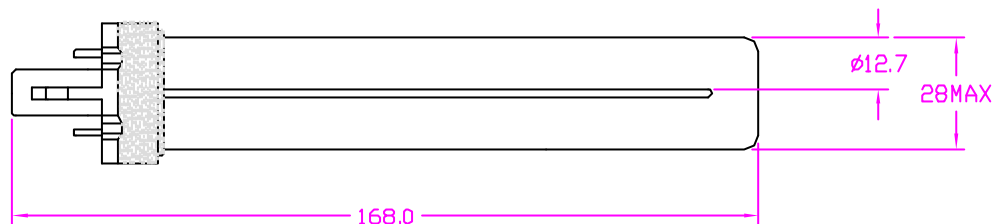

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	59 V
WATTAGE	9 W
CURRENT	0.180 A
COLOR TEMP	3500 K
CRI	B2
LUMENS	600 Lm
ANSI SHAPE	T-4 SINGLE TUBE
BASE TYPE	CAP TYPE-G23
Ave. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

NEXT ASSY
USED ON
APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DRAWN	R.AMPARO	03/07/01
			CHKD	K.CORDERO	03/07/01
			ENGR		
MATERIAL COMPOSITE			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			SIZE	B	
			SCALE	NONE	
			WEIGHT		
			SHEET	1 OF 1	

USHIO AMERICA, INC.

10550 Camden Dr. Cypress, CA 90630

TITLE

UFL-CF9S/835
COMPACT FLUORESCENT

CODE IDENT NO.

DWG NO.

3000060

SCALE

NONE

WEIGHT

SHEET

1 OF 1

4

3

2

1

CAD