

# ProLume® High Wattage Spirals

Catalog Number: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Date: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

COMPACTS

## Ordering Information

Watt	Bulb	Base	Product #	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Lumens	Equiv.	Avg Rated Life	MOL (inc)	
<b>HIGH WATTAGE</b>													
65 Watt	T5	Med.	45600	CFL65/27	Warm White	1/6	2700	82	4300	300 Inc.	10000	9.50"	
65 Watt	T5	Med.	45604	CFL65/50	Natural White	1/6	5000	82	4300	300 Inc.	10000	9.50"	
85 Watt	T5	Med.	45606	CFL85/27	Warm White	1/6	2700	82	5700	400 Inc.	10000	10.00"	
85 Watt	T5	Med.	45610	CFL85/50	Natural White	1/6	5000	82	5700	400 Inc.	10000	10.00"	
85 Watt	T5	Mog.	45500	CFL85/50/E39	Natural White	1/6	5000	82	5700	400 Inc.	10000	10.00"	
105 Watt	T5	Med.	45618	CFL105/50	Natural White	1/6	5000	82	7000	500 Inc.	10000	10.75"	
105 Watt	T5	Med.	45502	CFL105/50/277V	Natural White 277V	1/6	5000	82	7000	500 Inc.	10000	10.75"	
105 Watt	T5	Mog.	45614	CFL105/50/E39	Natural White	1/6	5000	82	7000	500 Inc.	10000	10.75"	
105 Watt	T5	Mog.	45504	CFL105/50/E39/277V	Natural White 277V	1/6	5000	82	7000	500 Inc.	10000	10.75"	
NEW	150 Watt	T6	EX39	47000	CFL150/50/EX39	Natural White	1/6	5000	82	8800	250 MH	10000	13.03"
NEW	180 Watt	T6	EX39	47001	CFL180/50/EX39	Natural White	1/6	5000	82	11100	400 MH	10000	14.33"

NEW ITEM!


Hg-LAMP CONTAINS MERCURY, MANAGE IN ACCORD WITH DISPOSAL LAWS.



Non-dimmable lamps should not be used on dimming circuits, timing devices, photo sensors or occupancy sensors. This device is not intended for use with emergency exit fixtures.

WARRANTY - Commercial / Industrial: This product is warranted for 1 year from the date of purchase, based on 10 hours of use per day. Not for use in enclosed fixtures.

## Energy Savings Comparison

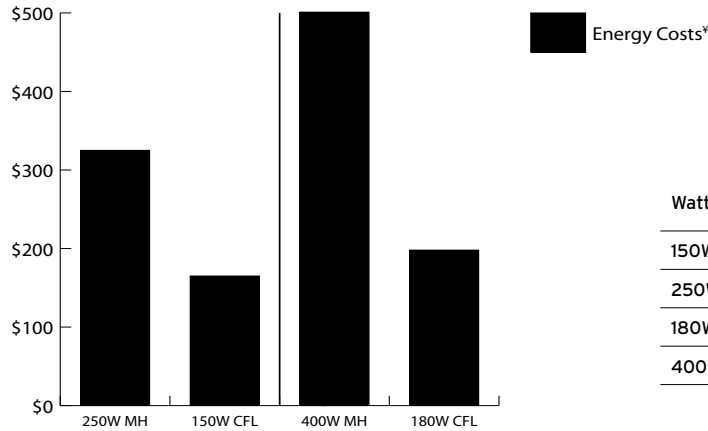

Watts	Energy Costs	Energy Savings
150W CFL	\$165	\$160
250W Metal Halide	\$325	
180W CFL	\$198	\$303
400W Metal Halide	\$501	

<sup>y</sup> Energy costs based on \$0.11 kWh over 10,000 hour life.