


T5 LED Light Tubes

24V DC 3000K CRI 85 Series



TRANSPARENT
ROTATING END CAP

SHADOWLESS
FROSTED POLYCARBONATE LENS

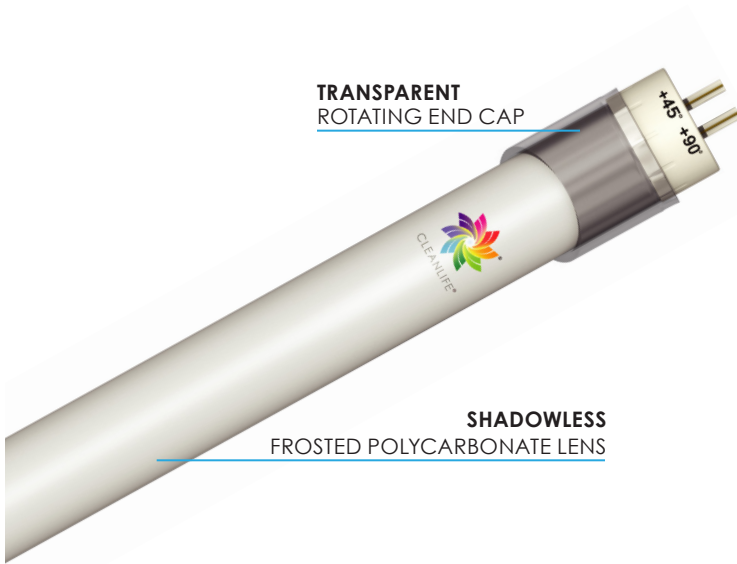

15-Year Limited Warranty

*Dimmable with compatible 24V constant voltage dimmable LED drivers only. Speak to a CLEANLIFE® representative for more information.

Save money and energy by switching to CLEANLIFE® T5 LED Light Tubes for all retail display and backlit mirrors or anywhere T5 fluorescent light tubes are being used.

FEATURES


- 24V Constant Current Design
- Long Lifetime, L70>50,000 Hours
- Instant On, No Flicker, Mercury Free, No UV
- High Efficacy, Up to 95 LPW
- Polycarbonate, frosted lens cover for even light distribution
- Glass free for safer working conditions
- Available in all standard T5 lengths as well as custom lengths, No MOQ Required
- Rotating end caps for targeted beam angle
- >180° Beam Angle, No hot spots!
- Operating Temperature from -13°F to +122°F
- Exceptional Color Accuracy, CRI 85
- CRI 95 and 2700K available for custom orders
- Energy savings of up to 66%*
- 15-Year Manufacturer's Limited Warranty
- UL Recognized for Damp Locations, CE and RoHS Compliant

*Compared with Traditional T5 Fluorescent Lamp Systems

SPECIFICATIONS

Dimensions	See Table
Beam Angle	>180°
Operating Temp.	-13°F~+122°F
Efficacy	See Table
Application	Indoor
Power Supply	24V Constant Voltage
Warranty	15-year Manufacturer's Limited

Color Temperature



3000K



Ultra Bright



Rotatable



Energy Saving



Robust Design



Specifications & Data



Project/Job	Notes
Date	
Comments	
Prepared by	


Ordering Information

Part Number	Length (IN)	Power (W)	Input Voltage (V)	Average Rated Life (hrs.)	CCT (±175)	Typical Lumens (lm) (+10%)	CRI (±5)	Base	Lumens Per Watt
CL-T5F11-30K-22DC24 (85 CRI)	22	11	24V DC	L70>50,000	3000K	1045	85	G5	95
CL-T5F17-30K-34DC24 (85 CRI)	34	17	24V DC	L70>50,000	3000K	1530	85	G5	90
CL-T5F18-30K-40DC24 (85 CRI)	40	18	24V DC	L70>50,000	3000K	1710	85	G5	95
CL-T5F22-30K-46DC24 (85 CRI)	46	22	24V DC	L70>50,000	3000K	2090	85	G5	95
CL-T5F28-30K-58DC24 (85 CRI)	58	28	24V DC	L70>50,000	3000K	2380	85	G5	85
CL-T5F37-30K-74DC24 (85 CRI)	74	37	24V DC	L70>50,000	3000K	3145	85	G5	85

Tube Dimensions

Part Number	(A) Length (in.)
-------------	---------------------

CL-T5F11-30K-22DC24 (85 CRI)	22.20
CL-T5F17-30K-34DC24 (85 CRI)	34.00
CL-T5F18-30K-40DC24 (85 CRI)	40.00
CL-T5F22-30K-46DC24 (85 CRI)	45.80
CL-T5F28-30K-58DC24 (85 CRI)	57.60
CL-T5F37-30K-74DC24 (85 CRI)	74.00

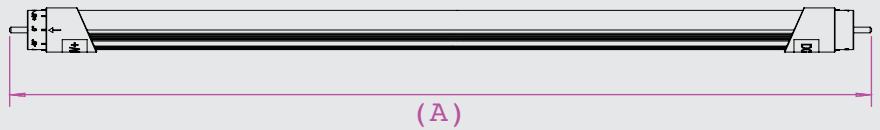

CLEANLIFE®

1-800-316-2532

info@cleanlife.com

www.cleanlife.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of Superior Ventures LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.

