



# CorePro LEDtube EM/ Mains



## CorePro LEDtube 600mm 8W840

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

### Warnings and Safety

• -

### Product data

General Information		Operating and Electrical	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	Input frequency	50 to 60 Hz
EU RoHS compliant	Yes	Power (Rated) (Nom)	8 W
Nominal lifetime (nom.)	30000 h	Lamp current (nom.)	38 mA
Switching cycle	200,000X	Starting time (nom.)	0.5 s
	Sphere	Warm-up time to 60% light (nom.)	0.5 s
		Power factor (nom.)	0.9
		Voltage (Nom)	220-240 V
Light Technical		Temperature	
Colour Code	840 [ CCT of 4,000 K]	T-ambient (max.)	45 °C
Beam Angle (Nom)	240 °	T-ambient (min.)	-20 °C
Luminous flux (nom.)	800 lm	T storage (max.)	65 °C
Colour designation	Cool White (CW)	T storage (min.)	-40 °C
Correlated Colour Temperature (Nom)	4000 K	T-Case maximum (nom.)	40 °C
Luminous efficacy (rated) (nom.)	100.00 lm/W		
Colour consistency	<6		
Colour rendering index (nom.)	80		
LLMF at end of nominal lifetime (nom.)	70 %		

# CorePro LEDtube EM/Mains

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Lamp Finish	Frosted
Bulb material	Glass
Product length	600 mm
Bulb shape	Tube, double-ended

## Approval and Application


Energy Efficiency Class	F
Energy-saving product	Yes
Approval marks	RoHS compliance CE marking KEMA Keur certificate

Energy consumption kWh/1,000 hours	8 kWh
	467306

## Product Data

Full product code	871951432531900
Order product name	CorePro LEDtube 600mm 8W840
EAN/UPC – product	8719514325319
Order code	32531900
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929003022102
SAP net weight (piece)	0.120 kg


## Dimensional drawing

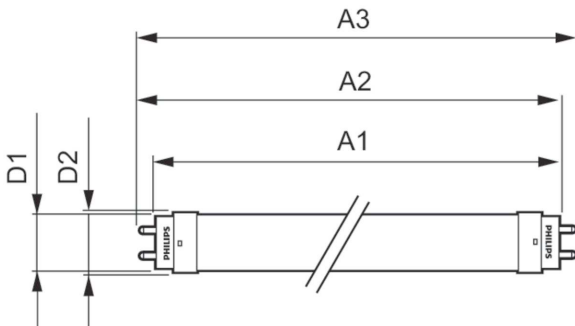


T8 Corepro 220-240V 8W 800lm 4000K

Product	D1	D2	A1	A2	A3
CorePro LEDtube 600mm 8W840	25.7 mm	28 mm	588.5 mm	595.5 mm	602.5 mm

## Photometric data

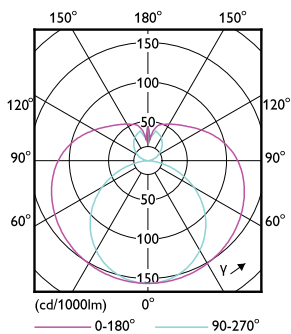


LEDtube COR 1 8W G13 800lm-LDD



LEDtube COR 1 8W G13 800lm 840-GUL


# CorePro LEDtube EM/Mains

## Photometric data

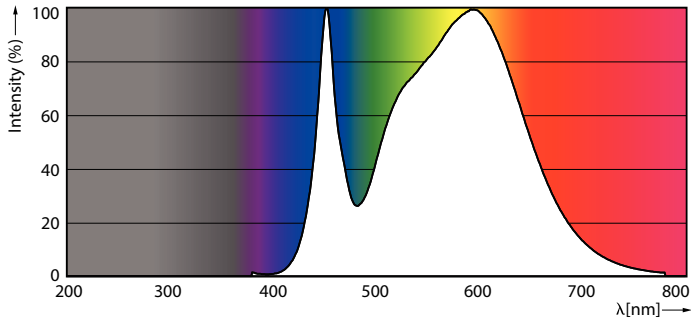


LEDtube COR 18W G13 800lm 840-POC


## Lifetime

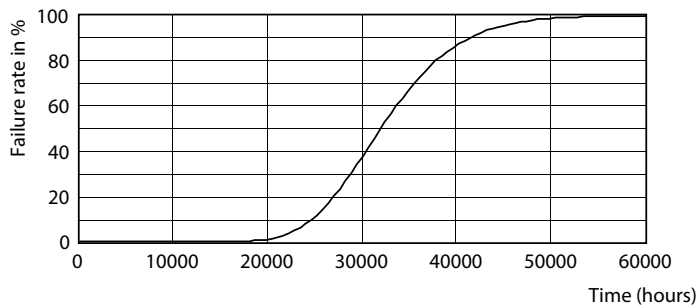


LEDtube 30K

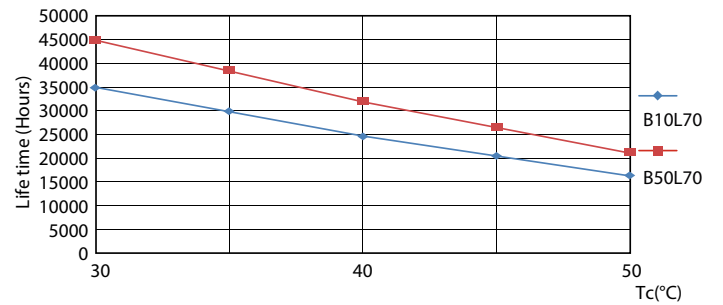

LEDtube COR 18W 30K LifetimeVsTc-LED

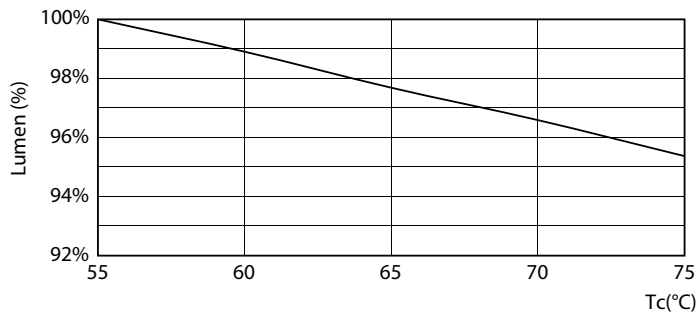


LEDtube COR 18W 30K LumenVsTc-LMP

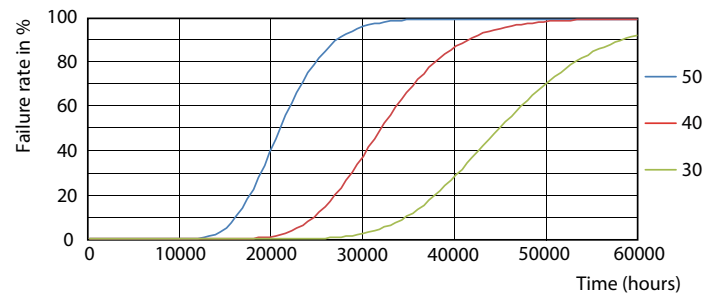

LEDtube COR 18W 30K FailureRate-LED

# CorePro LEDtube EM/Mains

## Lifetime

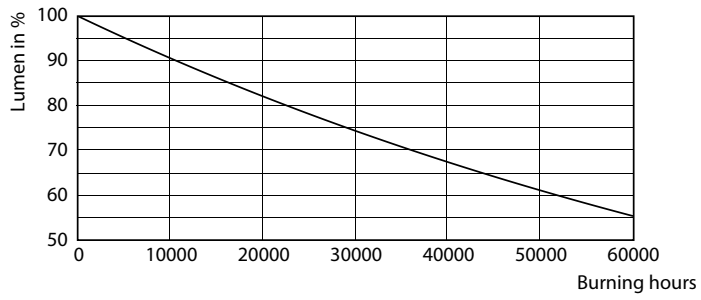

LEDtube 30K

