



CorePro LEDcandle



CorePro lustre ND 5-40W E14 827 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap base	E14 [E14]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	50,000X
	Sphere
Light Technical	
Colour Code	827 [CCT of 2,700 K]
Luminous flux (nom.)	470 lm
Colour designation	Warm white (WW)
Correlated Colour Temperature (Nom)	2700 K
Luminous efficacy (rated) (nom.)	94.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	5 W
Lamp current (nom.)	44 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s


Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.51
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	81 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Frosted
Bulb shape	P45 [P 45mm]
Approval and Application	
Energy Efficiency Class	F
Energy consumption kWh/1,000 hours	5 kWh
	453203
Product Data	
Full product code	871951431264700
Order product name	CorePro lustre ND 5-40W E14 827 P45 FR
EAN/UPC – product	8719514312647

CorePro LEDcandle

Order code	31264700
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929002969602

SAP net weight (piece)	0.020 kg
------------------------	----------


Dimensional drawing

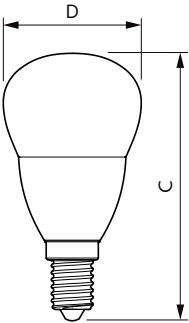


CorePro lustre ND 5-40W E14 827 P45 FR

Product	D	C
CorePro lustre ND 5-40W E14 827 P45 FR	45 mm	87 mm


Photometric data



LEDLustre Corepro P45 5W E27 827 FR-LDD



LEDlustre CorePro 5W P45 E14 827-GUL

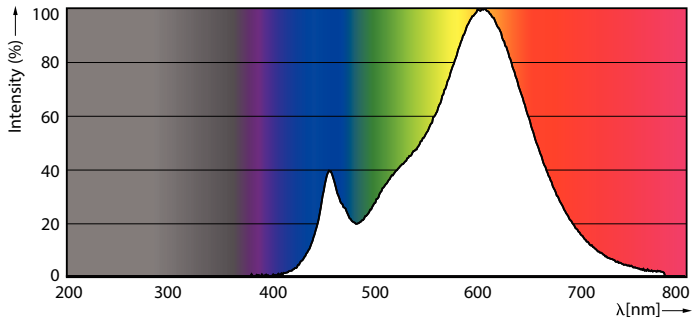

LEDLustre Corepro 5W P45 E27 827 FR-POC

CorePro LEDcandle

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram

