



## Description

Pavilion is a series of LED Canopy Lights. A surface mount luminaire with a low profile, lightweight design featuring long life and low maintenance. The fixtures are designed to allow for easy replacement of existing canopy lighting fixtures. The robust design paired with universal mounting makes them ideal for locations, such as retail canopies, where heavy pedestrian traffic makes maintenance difficult.

## Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating. To ensure weather-tight protection, each optical assembly is sealed with a silicone gasket. Luminaires are rated for an ambient operating temperature range of -40°C to 40°C.

## Electrical

The Class II power supply has a range of 120-277V, 50/60 Hz. 0-10V dimming capability is standard. Each fixture has a built-in 10kV surge protector.

## Mounting

The fixture is designed for universal surface and pendant mounting. IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE AVAILABILITY OF ADEQUATE SPACE FOR INSTALLATION.

## DLC Model# CPE-45CA

### Product Performance

Wattage	45W
Lumen Output	4532
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80+
Lumen Maintenance @50,000 hours*	94%
Calculated L70 @ 25°C Ambient in Hours*	319,000
Replaces HID Wattage	175W
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

### Physical Characteristics

Fixture Color	Bronze
Weight	6.1 lbs
Width	8.9"
Length	8.9"
Height	3.5"

### Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.39 208/0.23 240/0.19 277/0.17
Surge Protection	10kA

### Regulatory Qualifications

cULus Listed

DLC Qualified - Model# CPE-45CA

Lighting Facts Qualified

Rated for wet locations

### Accessories

PH56903 Button Photocell (120-277V)


SP12714 - 120-277V Surge Protector

## NOTE:

\*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11




# Venture Pavilion - 45W LED Canopy Light

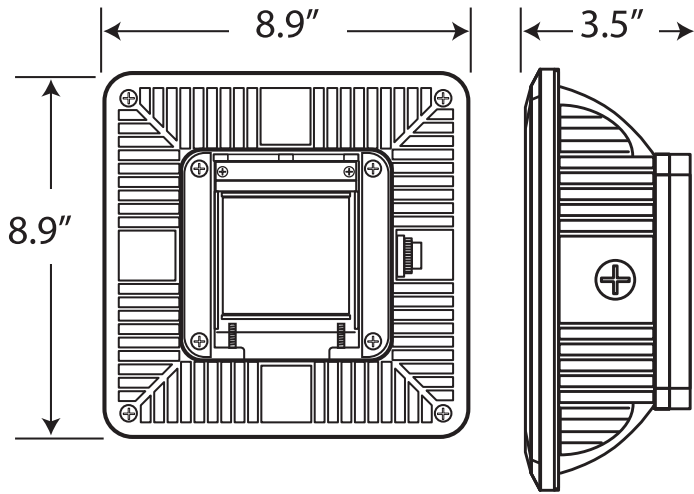

45W

10 ft.  
Height

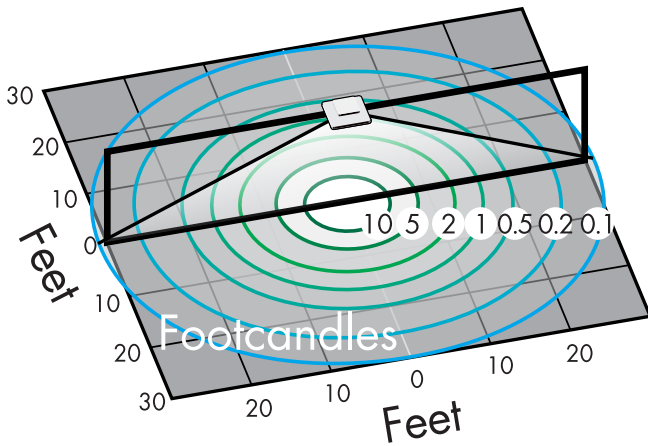

BUG Rating B2-U2-G1

