

LED Luminaires

ProLED Select Canopy

- CCT Selectable between 3000K, 4000K and 5000K
- Low profile, compact design
- Quick install mounting plate
- Available in bronze and white finishes
- Ceiling or pendant mount
- Occupancy Sensing
- DLC 5.1 Premium

Specifications



Description

The ProLED Select Slim Canopy is a durable and high performing luminaire that is a perfect solution for covered outdoor spaces. This slim canopy is designed with contractor friendly features such as the removable mounting plate that ensures a simple and secure installation. Equipped with ProLED Select CCT technology, the slim canopy allows users to quickly select between 3000K, 4000K and 5000K color temperatures in the field. With ease of installation, application versatility and ProLED Select technology, the Slim canopy is the ideal choice for retrofit and new build canopy applications.

Performance

- 28W, 40W and 60W options
- CCT selectable between 3000K-4000K-5000K
- >135 LPW
- L70 lumen maintenance > 100,000 Hours @ 25°C
- Built in 4kV surge protection
- 5 Year limited warranty
- 0-10V dimming
- 120-347VAC input

Certifications

- DLC 5.1 premium
- cULus
- IP65 rated
- UL listed for wet locations
- FCC
- RoHs compliant

Construction

- IK09 die-cast aluminum housing with integral heat sink
- Tamperproof and shatterproof polycarbonate lens
- Quick install mounting plate
- High efficiency, recessed optics for increased visual comfort

Controls

- 0-10 VDC dimming standard
- RF Bi-Level occupancy sensing

Applications

- Exterior canopies
- Parking garages
- Carports
- Stairwells
- Breezeways

ProLED Select Canopy

Product Description

Ordering Logic: Ex: CSP-40-CS-U-BZ

Series	Wattage	CCT	Voltage	Finish	Options
CSP	28 = 28 Watts 40 = 40 Watts 60 = 60 Watts	CS = Color Selectable 3000K-4000K-5000K	U = 120- 347VAC	BZ = Bronze WH = White	¹ MS = Integral RF Motion Sensor ¹ PC = Photocell

¹Lead times apply for non-stock configurations

Ordering Information

Stock SKU's			
	Product SKU	Product Code	Product Description
Stock	39900	CSP-28-CS-U-BZ	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze
	39901	CSP-40-CS-U-BZ	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze
	39902	CSP-60-CS-U-BZ	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze
	39904	CSP-28-CS-U-WH	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White
	39905	CSP-40-CS-U-WH	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White
	39906	CSP-60-CS-U-WH	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White
	28050	RM/MH10	Remote Control Programmer MC079D

Made-to-Order SKU's			
	Product SKU	Product Code	Product Description
Motion Sensor	20890	CSP-28-CS-U-BZ-MS	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Motion Sensor
	20891	CSP-40-CS-U-BZ-MS	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Motion Sensor
	20892	CSP-60-CS-U-BZ-MS	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Motion Sensor
	20893	CSP-28-CS-U-WH-MS	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Motion Sensor
	20894	CSP-40-CS-U-WH-MS	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Motion Sensor
	20895	CSP-60-CS-U-WH-MS	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Motion Sensor
Photocell	20860	CSP-28-CS-U-BZ-PC	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Photocell
	20861	CSP-40-CS-U-BZ-PC	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Photocell
	20862	CSP-60-CS-U-BZ-PC	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, Bronze, Photocell
	20863	CSP-28-CS-U-WH-PC	ProLED Select Slim Canopy, 28W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Photocell
	20864	CSP-40-CS-U-WH-PC	ProLED Select Slim Canopy, 40W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Photocell
	20865	CSP-60-CS-U-WH-PC	ProLED Select Slim Canopy, 60W, CCT Selectable (3000K-4000K-5000K), 120-347VAC Universal Voltage, White, Photocell

ProLED Select Canopy

Specifications Table


	CSP-28	CSP-40	CSP-60
Selectable CCT	3000K-4000K-5000K	3000K-4000K-5000K	3000K-4000K-5000K
Lumens	3,500-3,780 Lumens	5,000-5,400 Lumens	7,500-8,100 Lumens
Replacement	150W MH	175W MH	250W MH
Efficacy	125-135 LPW		
Amperage	120VAC(.23A) 277VAC(.10A)	120VAC(.33A) 277VAC(.15A)	120VAC(.50A) 277VAC(.21A)
CRI	>70		
L70 Lifetime (Hrs)	>100,000Hrs at 25°C		
Voltage	Universal 120-347VAC		
Power Factor	>.90		
Dimming	0-10VDC Dimming		
Surge Protection	4kV		
Housing	Die-cast aluminum with powder coated finish		
Lens	Polycarbonate Lens		
Op. Temperature	-40°C to 55°C		
Listings	cULus, DLC Premium, FCC		
Environment	UL Listed for Wet Location		
Weight	5.04 lbs	5.17 lbs	5.85 lbs
Warranty	5 Years Standard		

Performance Table

		3000K		4000K		5000K	
Model Number	Nominal Wattage	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
CSP-28-CS-U-XX	28 Watts	3500LM	125 LPW	3780LM	135 LPW	3640LM	130 LPW
CSP-40-CS-U-XX	40 Watts	5000LM	125 LPW	5400LM	135 LPW	5200LM	130 LPW
CSP-60-CS-U-XX	60 Watts	7500LM	125 LPW	8100LM	135 LPW	7800LM	130 LPW

Dimensions

ProLED Select Canopy Housing Dimensions

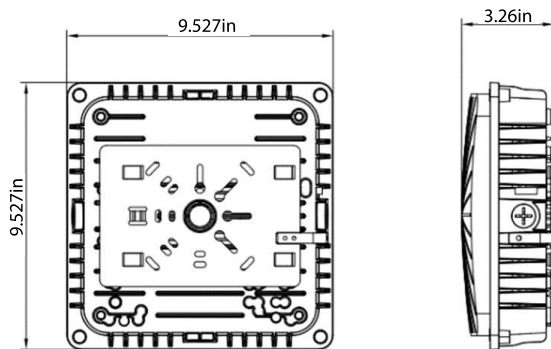


ProLED Select Canopy

Photometrics

*The below diagrams and zonal lumen summaries represent each fixture at highest wattage selection and at 5000K. For complete photometry/IES files, please contact the factory.


CSP-28-CS-U-XX

Zone	Lumens	% Lamp
0-20	335.34	8.6
0-30	748.69	19.2
0-40	1301.94	33.4
0-60	2648.48	67.9
0-80	3673.35	94.1
0-90	3782.25	96.9
10-90	3698.43	94.8
20-40	966.6	24.8
20-50	1628.58	41.7
40-70	1947.85	49.9
60-80	1024.87	26.3
70-80	423.56	10.9
80-90	108.9	2.8
90-110	61.38	1.6
90-120	77.77	2
90-130	89.83	2.3
90-150	107.83	2.8
90-180	120.29	3.1
110-180	58.91	1.5
0-180	3902.54	100

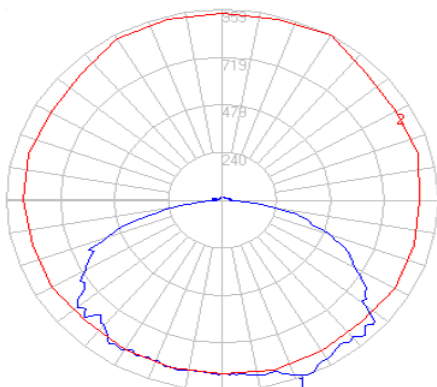

CSP-40-CS-U-XX

Zone	Lumens	% Lamp
0-20	461.12	8.5
0-30	1025.87	18.9
0-40	1780.3	32.8
0-60	3642.52	67.1
0-80	5143.66	94.7
0-90	5296.37	97.6
10-90	5180.81	95.4
20-40	1319.18	24.3
20-50	2219.99	40.9
40-70	2731.79	50.3
60-80	1501.14	27.7
70-80	631.58	11.6
80-90	152.71	2.8
90-110	47.48	0.9
90-120	70.17	1.3
90-130	88.36	1.6
90-150	114.75	2.1
90-180	132.4	2.4
110-180	84.91	1.6
0-180	5428.77	100

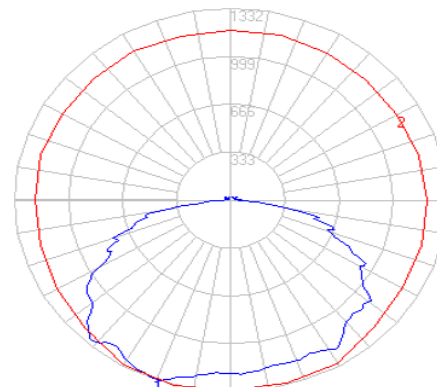

CSP-60-CS-U-XX

Zone	Lumens	% Lamp
0-20	579.48	7.6
0-30	1339.61	17.7
0-40	2393.25	31.5
0-60	5057.79	66.6
0-80	7349.21	96.8
0-90	7589.77	100
10-90	7449.84	98.2
20-40	1813.77	23.9
20-50	3106.61	40.9
40-70	3958.72	52.2
60-80	2291.42	30.2
70-80	997.25	13.1
80-90	240.55	3.2
90-110	0	0
90-120	0	0
90-130	0	0
90-150	0	0
90-180	0	0
110-180	0	0
0-180	7589.77	100

