

# Canopy + Shelf

## T5 & T8 BI-PIN LINEAR LED FIXTURE


# EFFICIENT LIGHTS

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

SPECIFICATION \_\_\_\_\_

- Designed for use in commercial refrigeration applications
- Approved for packaged and open food cases
- Standard design with rotatable endcaps for aiming
- Allows for daisy chain installation off one power supply
- 60,000 Hours (L70)
- Shatter resistant polycarbonate lens
- UL Type C listed for damp locations
- RoHS-compliant
- NSF Certified
- Class 2 Low voltage connection, minimizing shock hazard
- Requires 24 Vdc external power supply (sold separately)
- Controllable dimming system; See power supply product sheet for dimmability information

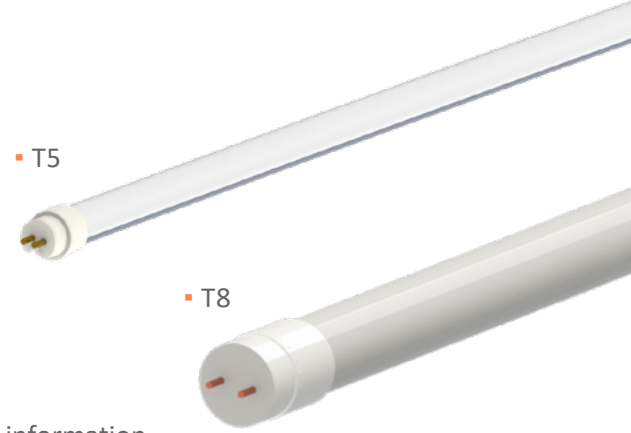


Nominal Length	Maximum Overall Length (MOL)	Output	Power (Watts)
60"	59 3/4"	3400	30.0
		2000	17.0
		1000	8.5
48"	47 3/4"	3000	26.0
		1600	13.0
		800	6.5
36"	35 3/4"	2600	22.5
		1200	10.0
		600	5.0
24"	23 3/4"	2000	17.0
		1000	8.5
		400	3.5
18"	17 1/4"	600	5.0
12"	11 1/4"	400	3.5

\*Output and power in table to left is shown at 80 CRI, 3500K. Use multiplier table below for correction factors.

CRI	CCT	Multiplier
80+	2700K	0.93
	3000K	0.97
	3500K	1.0
	4000K	1.02
	5000K	1.03
90+	2700K	0.80
	3000K	0.83
	3500K	0.86
	4000K	0.88
	5000K	0.89

▪ T5

▪ T8

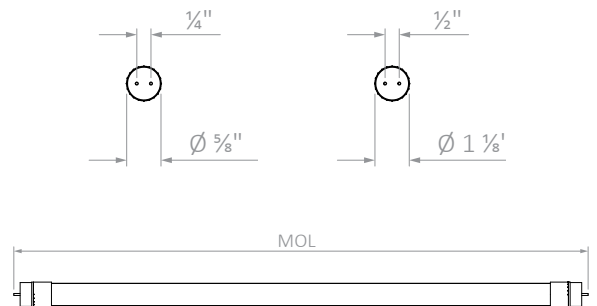

### Ordering Information

Example: CST5/48/D/30K/1600

Fixture	Lens	CRI + CCT	Lumen Output
CST5	D - Diffused	827 - 80+ CRI, 2700K	400
CST8		830 - 80+ CRI, 3000K	
		835 - 80+ CRI, 3500K	
Length		840 - 80+ CRI, 4000K	
		850 - 80+ CRI, 5000K	
		927 - 90+ CRI, 2700K	
18		930 - 90+ CRI, 3000K	
		935 - 90+ CRI, 3500K	
		940 - 90+ CRI, 4000K	
		950 - 90+ CRI, 5000K	
		600	
24		2000	
	1000		
	400		
36	2600		
	1200		
	600		
48	3000		
	1600		
	800		
60	3400		
	2000		
	1000		



\*Consult factory for lead time and availability

**WARNING:** Risk of electric shock. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved.