

DA15W700C0821-3001

Constant Current



Efficiency	>80%
Power Factor	>0.90+
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP44
Class	Class 2 Power Supply
Dimming	ELV, TRIAC
Output Voltage or Constant Current	700mA



- Fully dimmable with ELV & Triac dimmers
- Flicker free dimming
- Title 24 compliant
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements

FEATURES

- Aluminum casing for optimal heat dissipation
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Class 2 power supply
- Efficient, High power factor > 0.90

MODEL KEY

Model Number Key - Constant Current

(L)	DS	96W	2800C	1834	BR1	UD	(REO)	-3002
UL Listed (Option)	Input Voltage	Wattage	2800mA Constant Current	18V-34V DC Output Voltage Range	Case Form Factor	UniDriver Series Tri-Mode Dimmable	Remote Enclosure Code	Manufacturer Code
	DS = 120-277VAC DA = 120VAC DE = 277VAC DU = 220-240VAC						RE = Indoor REO = Outdoor (Option)	


MODEL SPECIFICATIONS

CONSTANT CURRENT					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DA15W700C0821-3001	120V	15W	08V - 21V DC	700mA	T11, BF, BF1


MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
T11	95 (77) x 31 x 21mm
BF	77 x 31 x 21mm (with studs)
BF1	77 x 31 x 21mm (no studs)

BF

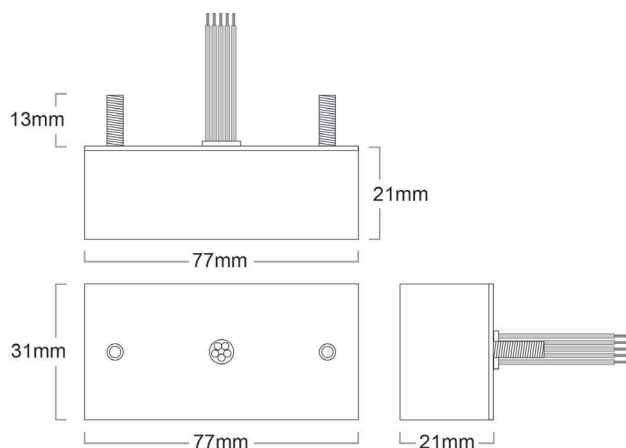

BF1

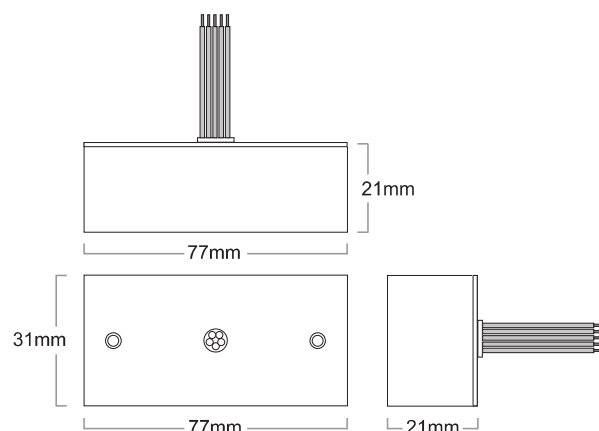

T11

