
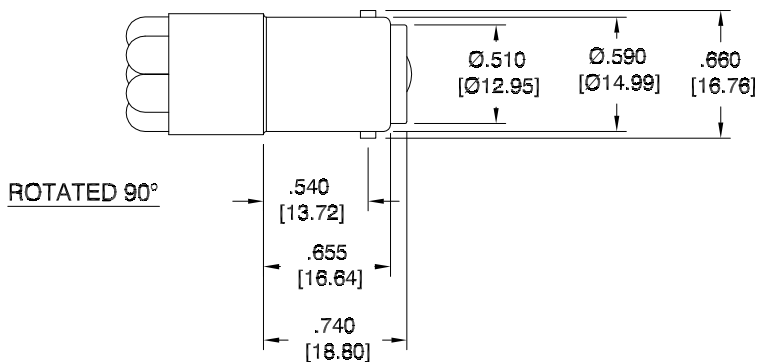


LTR	REVISION	DATE	APPD
-	RELEASED	07-11-19	

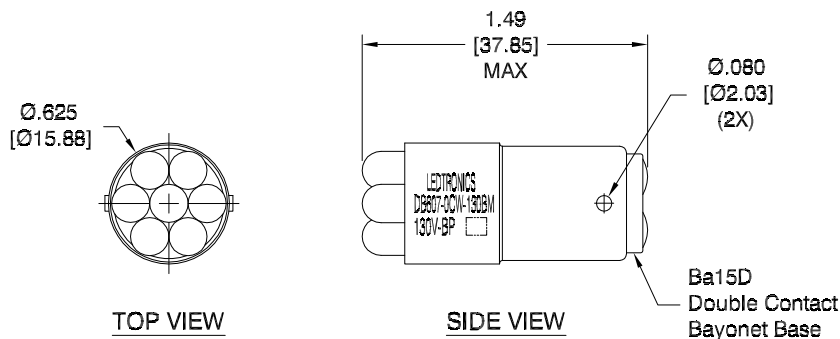

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
2. SLEEVE MATERIAL / COLOR: RYNITE FR530 / WHITE
3. BASE MATERIAL: NICKEL PLATED BRASS
4. AMBIENT OPERATING TEMPERATURE RANGE: ~-22°F to ~+122°F [~-30°C to ~+50°C]

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

DB607-0CW-130BM	COOL WHITE	130Vdc	1.5W	0.011 A	-	33.5 lm	8000K~10000K	40°	BiPolarDC(+/-)
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	TOTAL LUMENS	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)	CONTACT POLARITY

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p>		<p>TITLE DB607-0CW-130BM</p>								
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>		DWG NO	SCALE	SHEET	DATE					
			DB607-130V-BP	1:1	1 OF 1	07-11-19	CODE IDENT NO.	DWG BY GP	CHK BY	QA SB	MFG LD
		8Z410	07-11-19			07-11-19	07-11-19	07-11-19			