



LTR	REVISION	DATE	APPD
-	RELEASED	03-08-16	

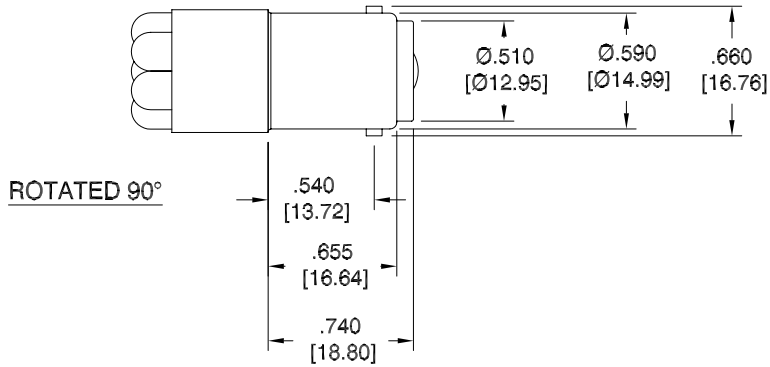

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: NICKEL PLATED BRASS

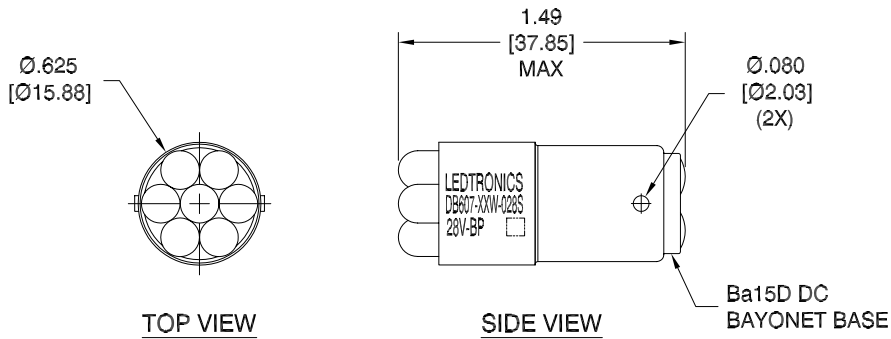

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

DB607-TPW-028S	TRUE WHITE	28Vdc	0.4W	0.013 A	49cd	32 lm	5000K	23°
DB607-XCW-028S	COOL WHITE	28Vdc	0.45W	0.015 A	74cd	21 lm	8000K	17°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	TOTAL LUMENS	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS, INC.[™]
 23105 KASHIWA COURT
 TORRANCE, CA 90505

-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE					
DB607-XXW-028S					
DWG NO	SCALE	SHEET	DATE		
DB607-28V-BP	1:1	1 OF 1	03-08-16		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP				LUV
	03-08-16				03-14-16