



LTR	REVISION	DATE	APPD
-	RELEASED	05-27-11	



ROTATED 90°

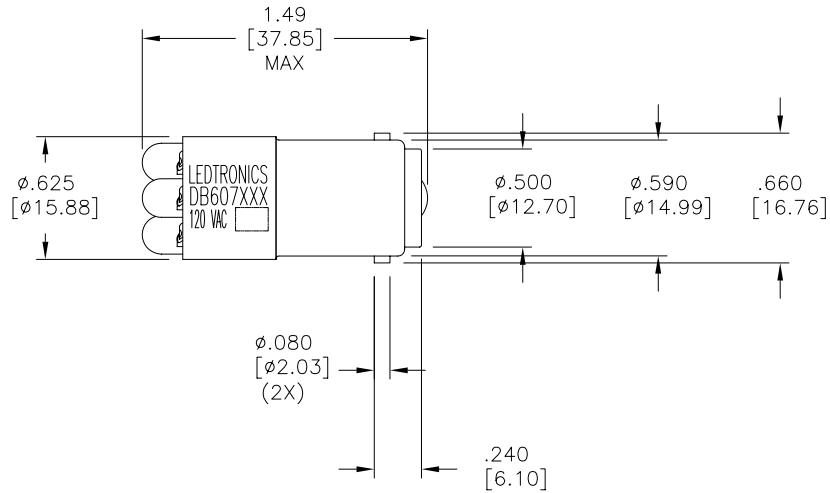

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. PARTS WITH (*) ARE "RoHS" CERTIFIED.
3. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530.
4. BASE MATERIAL: NICKEL PLATED BRASS WITH CERAMIC INSULATION.

REVISION NOTIFICATION

<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

DB607-0AG-120AN *	-	AQUA GREEN	120VAC	7	0.45 W	119cd	22 lm	520	16°
DB607-0CW-120AS *	-	COOL WHITE	120VAC	7	0.45 W	-	-	8000K	17°
DB607-0ER-120AS	DB607CWE3K-120VAC	SUPER RED	120VAC	8	0.56 W	45cd	9 lm	633	25°
DB607-0PB-120AN *	-	SUPER BLUE	120VAC	7	0.45 W	26cd	5 lm	462	16°
DB607-0UR-120AN	DB607CR3K-120VAC	ULTRA RED	120VAC	8	0.56 W	-	-	652	18°
DB607-0UY-120AN *	-	SUPER YELLOW	120VAC	8	0.56 W	43cd	7.5 lm	590	30°
DB607-2IW-120AS	-	WARM WHITE	120VAC	7	0.45 W	-	-	3000K	20°
DB607-XCW-120AS *	-	COOL WHITE	120VAC	7	0.45 W	74cd	21 lm	8000K	17°
DB607-XIW-120AS *	-	WARM WHITE	120VAC	7	0.45 W	74cd	17 lm	3000K	17°
DB607CR6-0001	DB607CR6-120VAC/10	ULTRA RED	120VAC	7	0.56 W	-	-	654	40°
DB607CWR6-0002 *	DB607CWR6-120VAC/10	ULTRA RED	120VAC	7	0.56 W	-	-	654	40°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	READ mA typ	POWER WATTS	MAXIMUM CANDELA	TOTAL LUMENS	λP nm	VIEWING ANGLE
ELECTRICAL TEST									



-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE					
DB607-XXX-120AX DB607CXX6-000X					
DWG NO	SCALE	SHEET	DATE		
DB607-120VAC	1:1	1 OF 1	05-27-11		
CODE IDENT NO.	DWG BY GP	CHK BY PL	QA	MFG	R&D
8Z410	05-27-11	05-27-11			