

# DC010-2G\_DC012-2G\_DC014-2G\_DC018-2G

## Ceiling Fixture



### Features

#### Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating  
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

#### Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

#### Electrical

High Power Factor, Low THD

#### Lamp


LED Type: Built-in (Color Temperature Option – 3500K, 5000K)

#### Certifications

ETL/cETL Listed, Energy Star

#### Warranty

5 Years Warranty on Driver and LED Module

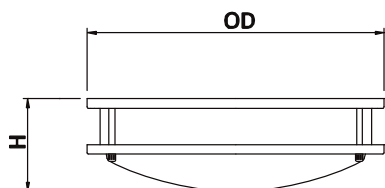

### LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	CRI	Lumen (TYP)	Dimension (OD X H)	Energy Star
DC010D-2G-11W-3000K	120V	11W	3000K	> 80	820	10.4" x 4.2"	Yes
DC010D-2G-11W-4100K	120V	11W	4100K	> 80	850	10.4" x 4.2"	Yes
DC010D-2G-3000K	120V	18W	3000K	> 80	1340	10.4" x 4.2"	
DC010D-2G-4100K	120V	18W	4100K	> 80	1400	10.4" x 4.2"	
DC012D-2G-11W-3000K	120V	11W	3000K	> 80	820	11.8" x 4.2"	Yes
DC012D-2G-11W-4100K	120V	11W	4100K	> 80	850	11.8" x 4.2"	Yes
DC012D-2G-3000K	120V	18W	3000K	> 80	1340	11.8" x 4.2"	Yes
DC012D-2G-4100K	120V	18W	4100K	> 80	1400	11.8" x 4.2"	Yes
DC014D-2G-3000K	120V ~ 277V	24W	3000K	> 80	2000	14.5" x 4.6"	Yes
DC014D-2G-4100K	120V ~ 277V	24W	4100K	> 80	2100	14.5" x 4.6"	Yes
DC016D-2G-3000K	120V ~ 277V	28W	3000K	> 80	2300	16.0" x 4.9"	Yes
DC016D-2G-4100K	120V ~ 277V	28W	4100K	> 80	2400	16.0" x 4.9"	Yes
DC018D-2G-3000K	120V ~ 277V	35W	3000K	> 80	2800	17.8" x 4.9"	Yes
DC018D-2G-4100K	120V ~ 277V	35W	4100K	> 80	2900	17.8" x 4.9"	Yes