

DC01x-2G-B Series / ECO1x-B Series

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in
 Available on Multiple Color Temperature Model (MCT)

Certifications

ETL/cETL Listed, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

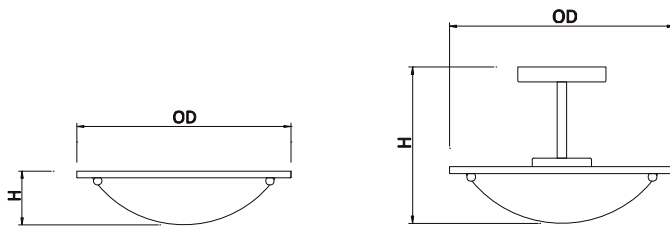

LED Type

Model	Input Voltage	Input Voltage	CRI	Finish	Lumen (Typ)	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-xxxxK	120V	18W	> 80	-	1340	3000K/3500K/4000K/5000K	12.5" x 3.8"	Yes
DC014D-2G-B-xxxxK	120V ~ 277V	23W	> 80	-	2150	3000K/3500K/4000K/5000K	15.0" x 3.8"	Yes
DC016D-2G-B-xxxxK	120V ~ 277V	28W	> 80	-	2600	3000K/3500K/4000K/5000K	16.6" x 4.1"	Yes
DC018D-2G-B-xxxxK	120V ~ 277V	35W	> 80	-	3250	3000K/3500K/4000K/5000K	18.4" x 4.1"	Yes
ECO12D-B-62-xxxxK	120V	12W	> 80	Satin Nickel	1390	3000K or 4000K	15.0" x 3.8"	---
ECO14D-MCT-B-62	120V	25W	> 80	Satin Nickel	1670	3000K, 3500K, 4000K	15.0" x 3.8"	---
ECO16D-MCT-B-62	120V	25W	> 80	Satin Nickel	1670	3000K, 3500K, 4000K	16.6" x 4.1"	---
ECO14D-MCT-B-62	120V	32W	> 80	Satin Nickel	2410	3000K, 3500K, 4000K	18.4" x 3.8"	---

Pendant LED Type

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-PD-xxxxK	120V	18W	> 80	1340 / 3000K	12.5" x 10.8"	Yes
DC014D-2G-B-PD-xxxxK	120V ~ 277V	23W	> 80	2150 / 3000K	15.0" x 10.8"	Yes
DC016D-2G-B-PD-xxxxK	120V ~ 277V	28W	> 80	2600 / 3000K	16.6" x 11.1"	Yes
DC018D-2G-B-PD-xxxxK	120V ~ 277V	35W	> 80	3250 / 3000K	18.4" x 11.1"	Yes