

Features

Housing

Die-formed Cold-rolled Steel and Epoxy Powder Coating
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (More Color Temperature Option – 3500K, 5000K)

Certifications

ETL/cETL Listed, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

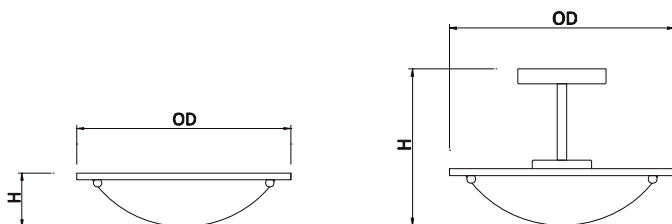

LED Type

Model	Input Voltage	Input Voltage	LED CT	CRI	Lumen (Typ)	Dimension (OD X H)	Energy Star
DC012D-2G-B-3000K	120V	18W	3000K	> 80	1340	13.0" x 3.8"	Yes
DC012D-2G-B-4100K	120V	18W	4100K	> 80	1400	13.0" x 3.8"	Yes
DC014D-2G-B-3000K	120V ~ 277V	24W	3000K	> 80	2000	15.2" x 3.8"	Yes
DC014D-2G-B-4100K	120V ~ 277V	24W	4100K	> 80	2100	15.2" x 3.8"	Yes
DC016D-2G-B-3000K	120V ~ 277V	28W	3000K	> 80	2300	17.0" x 4.0"	Yes
DC016D-2G-B-4100K	120V ~ 277V	28W	4100K	> 80	2400	17.0" x 4.0"	Yes
DC018D-2G-B-3000K	120V ~ 277V	35W	3000K	> 80	2800	18.8" x 4.0"	Yes
DC018D-2G-B-4100K	120V ~ 277V	35W	4100K	> 80	2900	18.8" x 4.0"	Yes

Pendant LED Type

Model	Input Voltage	Input Voltage	LED CT	CRI	Lumen (Typ)	Dimension (OD X H)	Energy Star
DC014D-2G-B-PD-3000K	120V ~ 277V	24W	3000K	> 80	2000	15.2" x 10.8"	Yes
DC014D-2G-B-PD-4100K	120V ~ 277V	24W	4100K	> 80	2100	15.2" x 10.8"	Yes
DC016D-2G-B-PD-3000K	120V ~ 277V	28W	3000K	> 80	2300	17.0" x 11.0"	Yes
DC016D-2G-B-PD-4100K	120V ~ 277V	28W	4100K	> 80	2400	17.0" x 11.0"	Yes
DC018D-2G-B-PD-3000K	120V ~ 277V	35W	3000K	> 80	2800	18.8" x 11.0"	Yes
DC018D-2G-B-PD-4100K	120V ~ 277V	35W	4100K	> 80	2900	18.8" x 11.0"	Yes