

DC220D DC221D DC222D

Ceiling Fixture & Pendant



Features

Housing

Brushed Aluminum

Finish Option: -30 Oil Rubbed Bronze

Pendant Height (H): Adjustable by Hanging Cable up to 6ft.

Optical

Diffused Glass Shade Create Excellent Light Distribution and Uniformity

Electrical

High Power Factor, Low THD

Lamp


Built-in LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light
Color Temperature Option – 3000K, 3500K, 4000K, 5000K

Certifications

ETL/cETL Listed, Suitable for Damp Locations, Energy Star

Warranty

5 Years Warranty on Driver and LED Module

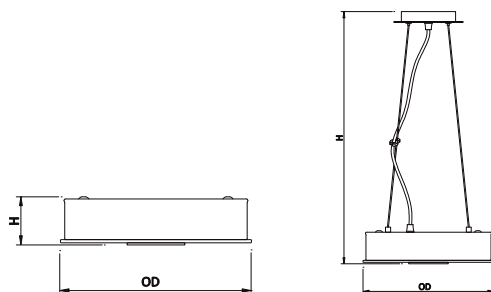

LED Type

Model	Input Voltage	Input Wattage	CRI	Lumen (TYP) / CT	Dimension (OD X H)	Energy Star
DC220D-xxxxK	120V	17W	> 80	1320 / 3000K	10.5" x 2.6"	Yes
DC221D-xxxxK	120V ~ 277V	23W	> 80	1900 / 3000K	15.0" x 2.6"	Yes
DC222D-xxxxK	120V ~ 277V	35W	> 80	2670 / 3000K	19.0" x 2.6"	Yes
DC221D-PD-xxxxK	120V ~ 277V	23W	> 80	1900 / 3000K	15.0" x H*	Yes
DC222D-PD-xxxxK	120V ~ 277V	35W	> 80	2670 / 3000K	19.0" x H*	Yes