

DC312 DC314 DC318

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel

Side Shade: Semi-clear White Decorative Fibre Linen

Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

Electrical

High Power Factor, Low THD

Lamp

LED Type: Built-in (Color Temperature Option – 3500K, 5000K)


CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL, ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on LED Driver and LED Module

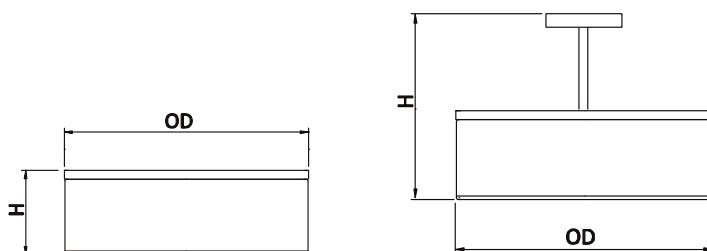

LED Type

Model	Input Voltage	Input wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD x H)	Shade
DC312D-3000K	120V ~ 277V	18W	3000K / 80	1340	12.4" x 5.0"	Acrylic / Linen
DC312D-4000K	120V ~ 277V	18W	4000K / 80	1400	12.4" x 5.0"	Acrylic / Linen
DC314D-3000K	120V ~ 277V	24W	3000K / 80	2000	15.0" x 5.0"	Acrylic / Linen
DC314D-4000K	120V ~ 277V	24W	4000K / 80	2100	15.0" x 5.0"	Acrylic / Linen
DC318D-3000K	120V ~ 277V	35W	3000K / 80	2800	18.2" x 5.0"	Acrylic / Linen
DC318D-4000K	120V ~ 277V	35W	4000K / 80	2900	18.2" x 5.0"	Acrylic / Linen
DC318D-PD-3000K	120V ~ 277V	35W	3000K / 80	2800	18.2" x 11.0"	Acrylic / Linen
DC318D-PD-4000K	120V ~ 277V	35W	4000K / 80	2900	18.2" x 11.0"	Acrylic / Linen

CFL Type

Model	Input Voltage	Input Wattage	Shade	Lamp	Dimension (OD x H)
DC312PG-123	120V	23W	Acrylic / Linen	1 x 23W GU24	12.4" x 5.0"
DC314PG-218	120V	36W	Acrylic / Linen	2 x 18W GU24	15.0" x 5.0"
DC318PG-318	120V	54W	Acrylic / Linen	3 x 18W GU24	18.2" x 5.0"
DC318PG-PD-318	120V	54W	Acrylic / Linen	3 x 18W GU24	18.2" x 11.0"