


4

3

DWG NO. 1000177 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

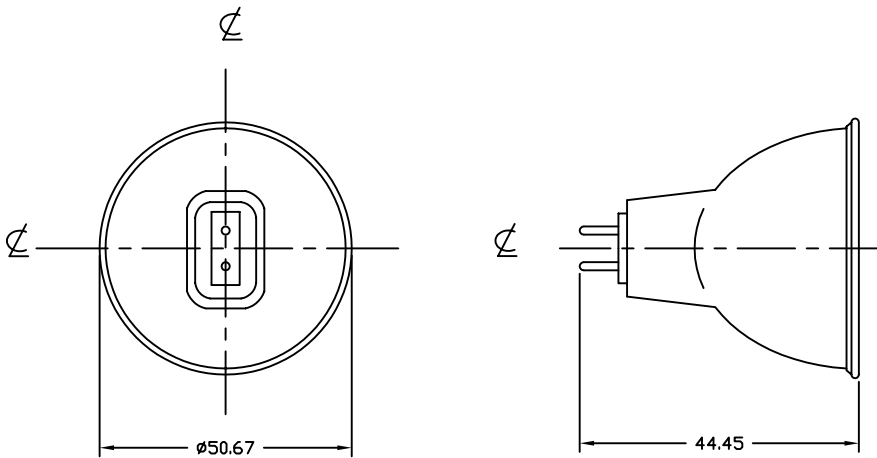

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	21 V
WATTAGE	80 W
COLOR TEMP	3150 K
AVERAGE LIFE	500 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Faceted
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING MATERIAL COMPOSITE FINISH		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO			08/24/99
		CHKD	D.GILCZYNSKI			08/24/99
		ENGR		TITLE DDS JCR21V-80W		
		MFG				
		QUAL				
		DSGN ACTVY				
		GOVT ACTVY		SIZE	CODE IDENT NO.	DWG NO.
				B	DDS	1000177
		SCALE	WEIGHT		SHEET	
		NONE			1 OF 1	