

DL21 LED DIRECTIONAL LIGHT SPEC SHEET

DL21

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

CATALOG ORDER LOGIC

EXAMPLE: DL21L24BLT

FIXTURE

DL

TYPE

21

DOWN LIGHT OPTION

☐ D

12 VOLT LED	WATT	SOCKET	DEGREE	KELVIN	LUMEN
☐ NL (No Lamp)					
☐ NLBP (No Lamp)		GU5.3 Bi-Pin			
☐ L22	3w	GU5.3 Bi-Pin	15°	3000K	270lm
☐ L24	3w	GU5.3 Bi-Pin	36°	3000K	270lm
☐ L26	3w	GU5.3 Bi-Pin	80°	3000K	270lm
☐ L34	5w	GU5.3 Bi-Pin	15°	3000K	450lm
☐ L36	5w	GU5.3 Bi-Pin	36°	3000K	450lm
☐ L38	5w	GU5.3 Bi-Pin	80°	3000K	450lm
☐ L40	5w	GU5.3 Bi-Pin	36°	Amber	585-595nm
☐ L46	7w	GU5.3 Bi-Pin	15°	3000K	550lm
☐ L48	7w	GU5.3 Bi-Pin	36°	3000K	550lm
☐ L50	7w	GU5.3 Bi-Pin	80°	3000K	550lm

120 VOLT LED	WATT	SOCKET	DEGREE	KELVIN	LUMEN
☐ NL (No Lamp)					
☐ NL120V		GU10			
☐ L106	3w	GU10	15°	3000K	270lm
☐ L108	3w	GU10	36°	3000K	270lm
☐ L110	3w	GU10	80°	3000K	270lm
☐ L114	5w	GU10	15°	3000K	450lm
☐ L116	5w	GU10	36°	3000K	450lm
☐ L118	5w	GU10	80°	3000K	450lm
☐ L119	5w	GU10	36°	Amber	585-595nm
☐ L124	7w	GU10	15°	3000K	550lm
☐ L126	7w	GU10	36°	3000K	550lm
☐ L128	7w	GU10	80°	3000K	550lm

OPTIONS

- ☐ NS No Stake
☐ 25F 25 Foot Fixture Lead Wire

FINISH (standard finishes listed)

- ☐ BLT Black Texture (Standard) More powder coat options, see page 4
☐ BRT Bronze Texture (Standard) More powder coat options, see page 4

Premium and Acid Finishes (See page 4 for more color options)

Pantone & RAL Colors (Enter RAL or Pantone number at end of part number)

SHIP WEIGHT


Aluminum 6100 (2.0lbs)


ADDITIONAL INFORMATION

- LED's are dimmable with Triac dimming



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

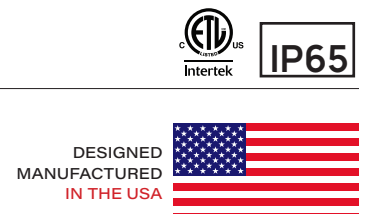



DL21 LED DIRECTIONAL LIGHT SPEC SHEET

DL21


PROJECT:	TYPE:	DATE:
CATALOG NUMBER:		

SPECIFICATIONS

INTERNALS	VOLTAGE	12V-120V
	LED	MR16 Super Saver LED
	WATTAGE	3W / 5W / 7W
	LUMENS	270lm (3w) / 450lm (5w) / 550lm (7w)
	WIRING	12V Black, 3 foot 18/2 zip cord from base of fixture. For 25ft 16/2 fixture lead wire add (-25F) to catalog number (12V Only)
	LENS	High impact clear tempered convex glass
	O-RING	70 Durometer 400° Purple silicone
	OPTICS	Based on bulb used (15° / 36° / 80°)
EXTERNALS	HOUSING	Extruded Aluminum, Brass, Composite
	SWIVEL	Cast Aluminum, Cast Brass, Composite (240° rotation)
	CAP	Matching Aluminum, Brass, Composite
	MOUNT	For 12V: FA03 Black ABS 9" Stake - Aluminum version (standard); FA03LG Large Black ABS 9" Stake For 120V-277V: Mounting options not supplied. Order separately FA26 Post or other outdoor rated mount
	FINISH	Aluminum: Black Texture Polyester Powder Coat (More options available on page 8)
	LISTINGS	IP66. Indoor/Outdoor use. Suitable for wet locations




FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM



DESIGNED
MANUFACTURED
IN THE USA





DL21 LED DIRECTIONAL LIGHT SPEC SHEET

DL21

PROJECT:

TYPE:

DATE:


CATALOG NUMBER:

DIMENSIONS



Dimensions Shown with FA03 Stake


12-Volt

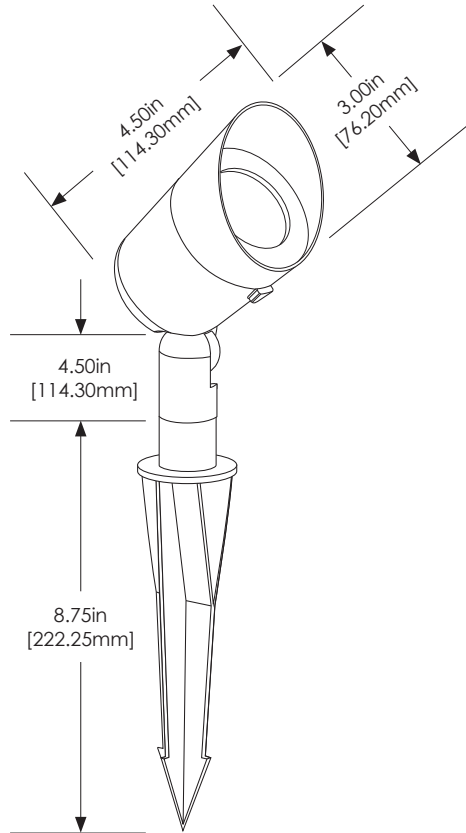

MOUNTING OPTIONS


Dimensions Shown with FA03 Stake

12-Volt




Dimensions Shown with FA2660W Post (12V-277V)

12-277-Volt

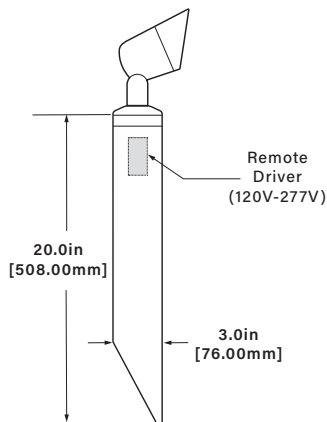


Dimensions Shown with FAJBox (12V-277V)

12-277-Volt



Dimensions Shown with FA24LG (12V-277V)

12-277-Volt



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA





DL21 LED DIRECTIONAL LIGHT SPEC SHEET

DL21

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

ACCESSORIES

(Configure and order accessories separately)

Stakes



FA03
8.75"
(12v)




FA03LG
8.875"
(12v)



FA03RX
7.00"
(12v)



FA032P
8.235"
(12v)



FA033P
8.235"
(12v)


Mounting Posts




FA01
15.00"
(12v)



FA24MDCSTPOST
13.00" to 16.00"
(12v)



FA25
20.00"
(12v)



FA26
20.00"
(120-277v)

Extension Wands & Couplers



FA30-4
4.00"



FA30-8
8.00"



FA30
10.00"



FA31
13.00"



FA32
16.00"



FA33
21.00"



FA34
26.00"

(12-277v)

Canopies & Adapters



FA24/BRS
3.00" dia.
(12v)



FA24MDCST/BRS
2.65" dia.
(12v)



FA24MDCSTPC/BRS
2.65" dia.
(12v)



FA24MD
(12v)



FA24LGSPUN/BRS
4.75" dia.
(12v)



FA24LGCST/BRS
4.75" dia.
(12-277v)



FA24LGDHBR
(12-277v)



FA23CST
(12-277v)



FATAD
(12-277v)




FA22LGCST/BRS
5.75"
(12-277v)

Tree Mounts




FA22TREE
(12-277v)




FA24MDCSTTREE
(12v)




FA24T
(12v)



C/FA111TPS
(12-277v)



C/FA111T
(120-277v)



C/FA111
(12-277v)

Lenses



FA11BLUE
(Color Glass Lens)



FA11GREEN
(Color Glass Lens)



FA11AMBER
(Color Glass Lens)



FA11RED
(Color Glass Lens)



FA104SB
(Sand Blasted Lens)



FA98
(Linear Lens)



FA0821
(Hex Cell Louver)

Direct Burials & JBoxes




DBR55JB
(12-277v)



FA-JBOX
(12-277v)





DL21 LED DIRECTIONAL LIGHT SPEC SHEET

DL21

PROJECT:

TYPE:

DATE:

CATALOG NUMBER:

LED DATA

12v MR16 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L22	2700K	80	3	270	40,000
L24	2700K	80	3	270	40,000
L26	2700K	80	3	270	40,000
L34	2700K	80	5	450	40,000
L36	2700K	80	5	450	40,000
L38	2700K	80	5	450	40,000
L40	Amber	~	5	(585-595nm)	40,000
L46	2700K	80	7	550	40,000
L48	2700K	80	7	550	40,000
L50	2700K	80	7	550	40,000

120v MR16 DATA


L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L106	2700K	80	3	270	40,000
L108	2700K	80	3	270	40,000
L110	2700K	80	3	270	40,000
L114	2700K	80	5	450	40,000
L116	2700K	80	5	450	40,000
L118	2700K	80	5	450	40,000
L119	Amber	~	5	(585-595nm)	40,000
L124	2700K	80	7	550	40,000
L126	2700K	80	7	550	40,000
L128	2700K	80	7	550	40,000

FINISHES

STANDARD FINISHES



PREMIUM FINISHES

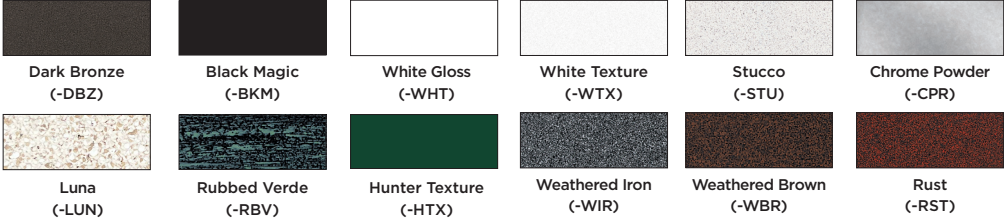


CUSTOM FINISHES

RAL #:
Need help finding a RAL color?
<https://www.ralcolor.com/>

PANTONE #:
Need help finding a Pantone color?
<https://www.pantone.com/color-finder>

ACID FINISHES Brass and Copper fixtures only



FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA

