


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

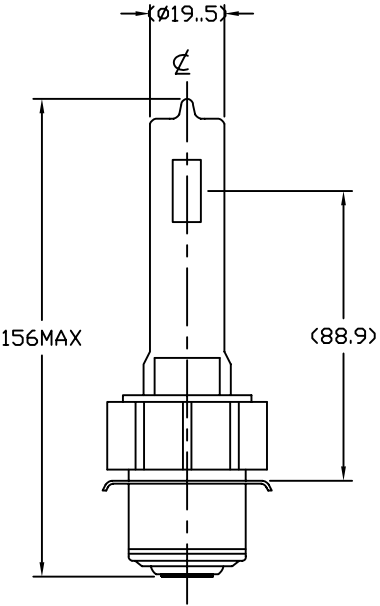

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	500 W
COLOR TEMP.	3050 K
TOTAL LUMEN	11000 Lm
BASE TYPE	P28S
AVERAGE LIFE	500 HRS
FILAMENT TYPE	C-13D
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	08/30/99	TITLE FMC/DNS JCS120V-500WB2	
		CHKD	D.GILCZYNSKI	08/30/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
FINISH		GOVT ACTVY		B	FMC	1000208
				SCALE	WEIGHT	SHEET
				NONE		1 OF 1

NEXT ASSY	USED ON

APPLICATION