



d#series

# D-Series DSXF2 LED Floodlight



Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements


## Introduction

The D-Series floodlights feature a site-wide offering to meet specifier's every floodlighting need in application. The D-Series flood offers three sizes delivering 3,000 to 27,000 lumens. Available with seven precision optics, three mountings and three color temperatures, D-Series floodlights offer vast design capabilities while delivering significant energy savings and long life.

The DSXF2 delivers 7,000 to 17,000 lumens, meeting a large breadth of illumination requirements for design and renovation when replacing 175W, 250W and 400W HID floodlights. All configurations are assembled in the USA allowing for quick delivery.

## Specifications

<b>EPA @ 90°:</b>	0.8 ft <sup>2</sup> (0.07 m <sup>2</sup> )
<b>Depth:</b>	4.32" (11.0 cm)
<b>Width:</b>	12.87" (32.7 cm)
<b>Height:</b>	7.83" (19.9 cm)
<b>Overall Height:</b>	15.33" (39.0 cm)
<b>Weight:</b>	12.0 lbs (5.4 kg)

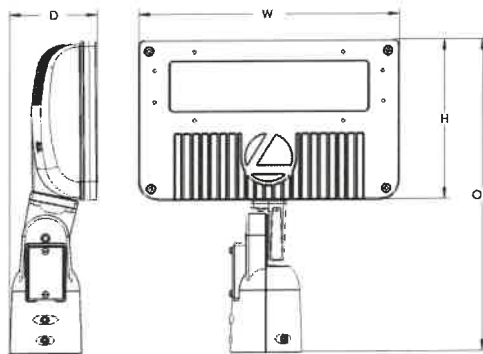

## Ordering Information

**EXAMPLE:** DSXF2 LED P1 40K 70CRI MSP MVOLT THK DDBXD

DSXF2 LED						
Series	Performance Package	Color Temperature	CRI	Distribution	Voltage	Mounting
DSXF2 LED	P1	30K 3000K	70CRI	WFL Wide flood (6X6)	MVOLT <sup>2</sup>	<b>Shipped included</b>
	P2	40K 4000K		FL Flood (5X5)		
	P3	50K 5000K		MFL Medium flood (4X4)		
	P4 <sup>1</sup>	WFR Wide flood, rectangular (6X5)				
		HMF Horizontal flood (6X4)				
	MSP Medium spot (4X4)					
	NSP Narrow spot (3X3)					

Options		Finish (required)
<b>Shipped installed</b>		DDBXD Dark bronze
PE	Photocontrol, button style (MVOLT or 347V) <sup>3</sup>	DBLXD Black
DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)	DNAXD Natural aluminum
SPD10KV	Separate surge protection	DWHXD White
CCE	Coastal Construction	
<b>Shipped separately<sup>4</sup></b>		
UBV	Upper/bottom visor (universal)	
FV	Full visor	
VG	Vandal guard	

## Accessories<sup>4</sup>

Ordered and shipped separately.

DSXF1/2TS DDBXD U	Slipfitter for 1-1/4" to 2-3/8" OD tenons; 1/2" THK required (specify finish)
FTS CG6 DDBXD U	Slipfitter for 2-3/8" to 2-7/8" OD tenons; YKC62 required (specify finish)
FRWB DDBXD U	Radius wall bracket, 2-3/8" OD tenon (specify finish)
FSPB DDBXD U	Steel square pole bracket, 2-3/8" OD tenon (specify finish)
DSXF2UBV DDBXD U	Upper/bottom visor accessory (specify finish)
DSXF2FV DDBXD U	Full visor accessory (specify finish)
DSXF2VG U	Vandal guard accessory

For more mounting options, visit our [Floodlighting Accessories](#) pages.

## NOTES

- Performance package P4 is not available with HMF, MFL, MSP and NSP optics.
- MVOLT driver operates on line voltage from 120-277V.
- Requires MVOLT or 347V (Not available in 480V).
- Also available as separate accessories; see Accessories information at left.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2012-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSXF2-LED  
Rev. 03/26/24  
Page 1 of 6