


4

3

DWG NO. 1000220 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

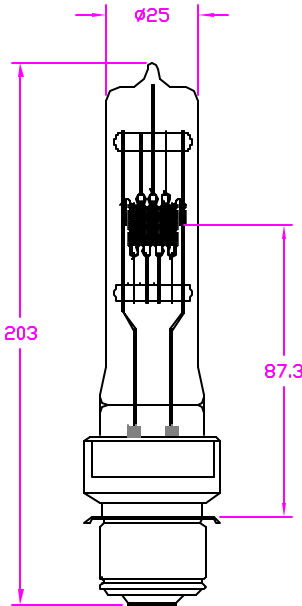

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1500 W
TOTAL LUMEN	39000 Lm
COLOR TEMP.	3200 K
AVERAGE LIFE	100 HRS
BASE TYPE	P40s
FILAMENT TYPE	C-13D
BURN POSITION	BD

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS				
LIST OF MATERIALS									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± — .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630 TITLE DTA, JCS120V-1500WCP40 HALOGEN LAMP					
		APPROVALS				DATE			
		DRAWN	R.AMPARO			05/15/01			
		CHKD	J.COOPER			05/15/01			
		ENGR			SIZE B		CODE IDENT NO.		DWG NO.
		MF8					DTA		1000220
		QUAL					SCALE		WEIGHT
MATERIAL		DSGN ACTVY		NONE				1 OF 1	
COMPOSITE		GOV'T ACTVY							
FINISH									

4

3

2

1

CAD