

PRODUCT DATASHEET

D STICK 20 W/6500K 220...240 V E27

OSRAM DULUX STICK | Compact fluorescent integrated, stick shape



AREAS OF APPLICATION

- High-quality domestic and professional environments
- General illumination
- Outdoor use in enclosed and ventilated luminaires only

PRODUCT BENEFITS

- Excellent price/performance ratio
- Great variety of light colors

PRODUCT FEATURES

- Good quality of light; color rendering index $R_a: \geq 80$; constant chromaticity
- Average life: 10,000 h



TECHNICAL DATA


Electrical data

Rated wattage	20.00 W
Nominal voltage	220...240 V
Nominal wattage	20.00 W
Operating frequency	50...60 Hz

Photometrical data

Nominal luminous flux	1180 lm
Rated luminous flux	1180 lm
Rated color temperature	6500 K
Light color	865
Light color (designation)	Cool Daylight
Color temperature	6500 K
Luminous flux	1180 lm
Color rendering index Ra	≥80
Color rendering group	1B

Dimensions & weight



Maximum diameter	49.0 mm
Overall length	161.0 mm
Product weight	80.00 g
Length	161.0 mm

Temperatures & operating conditions

Ambient temperature range	-10...+50 °C
----------------------------------	--------------

Lifespan

Nominal lamp life time	10000 h
-------------------------------	---------

Rated lamp life time	10000 h
-----------------------------	---------

Additional product data

Base (standard designation)	E27
Mercury content	2.0 mg
Show WEEE picto	Yes

Capabilities

Dimmable	No
-----------------	----


Certificates & standards

Energy consumption	20 kWh/1000h
Energy efficiency class	A
Cleaning instruction in case of breakage	What to do if a lamp containing mercury breaks?

Country-specific categorizations

ILCOS	FBT-20/865-220/240-E27
--------------	------------------------

Light Distribution

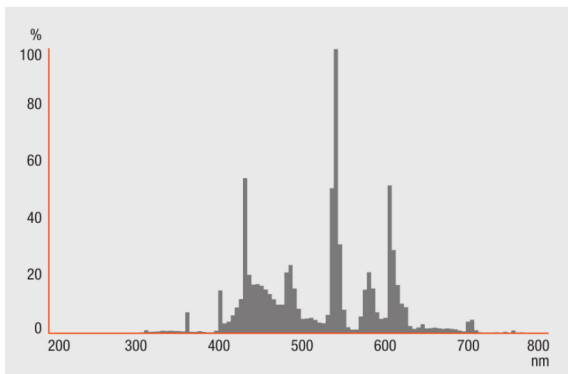

Spectral power distribution

SAFETY ADVICE

In case of lamp breakage: www.ledvance.com/brokenlamp
Not for use with external dimmers or electronic switches.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321360847	Folding carton box 1	156 mm x 47 mm x 62 mm	106.25 g	0.45 dm ³
4008321360854	Shipping carton box 10	242 mm x 173 mm x 107 mm	1050.44 g	4.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.