

4


3

DWG NO. 1000225 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

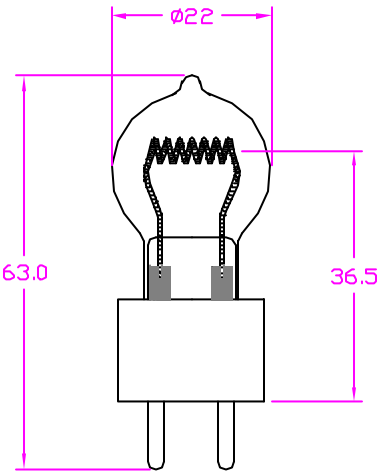

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	650 W
LUMEN OUTPUT	20000 Lm
COLOR TEMP.	3400 K
BASE TYPE	G5.3
AVERAGE LIFE	25 HRS
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	04/17/01	TITLE DVY JCD120V-650WSP HALOGEN LAMP	
		CHKD		04/17/01		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
FINISH		GOVT ACTVY		B	DVY	1000225
				SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD