
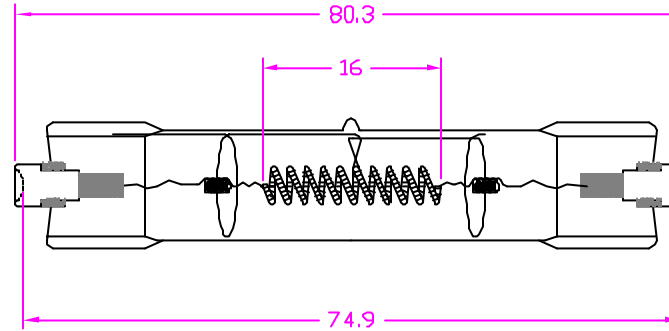


REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------



NOTE5:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	650 W
COLOR TEMP	3400 K
LUMENS	20000 Lm
AVERAGE LIFE	25 HRS
FILAMENTTYPE	CD-B
BASE TYPE	R7s-18
BULB FINISH	CLEAR

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	04/17/01	TITLE DWY JPD120V-650WS DOUBLE ENDED HALOGEN LAMP	
		CHKD		04/17/01		
		ENGR				
		MFG				
MATERIAL	QUAL		SIZE	CODE IDENT NO.	DWG NO.	
COMPOSITE	DSGN ACTVY		B	DWY	1000229	
FINISH	QOVT ACTVY		SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	