



4

3

DWG NO. 1000230 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

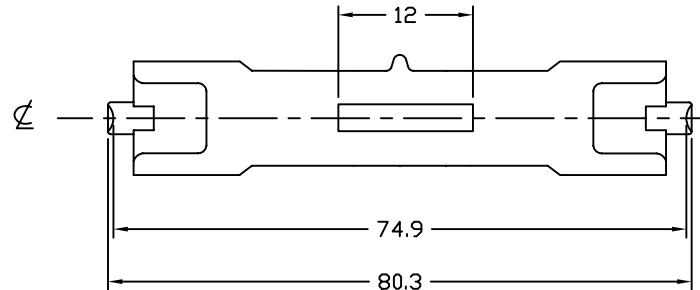

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	30 V
WATTAGE	375 W
COLOR TEMP.	3000 K
TOTAL LUMEN	7500 Lm
BASE TYPE	R7s-18
AVERAGE LIFE	1000 HRS
FILAMENT TYPE	CC-8
BURN POSITION	Any

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630	
		APPROVALS			
		DRAWN	R.AMPARO	12/17/99	TITLE DWZ(30V) JPD30V-375W
		CHKD	D.GILCZYNSKI	12/17/99	
		ENGR			
		MFG			
		MATERIAL	QUAL		SIZE
COMPOSITE			B	DWZ	1000230
FINISH	DSGN ACTVY		SCALE	WEIGHT	SHEET
	GOVT ACTVY				

4

3

2

1

CAD