


DWG NO. 1000252 SH 1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

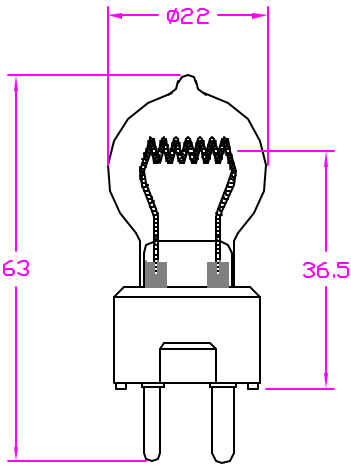

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	125 V
WATTAGE	550±39 W
LUMEN OUTPUT	13750 Lm
COLOR TEMP.	3200 K
BASE TYPE	GY9.5
AVERAGE LIFE	75 HRS
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN	R.AMPARO	06/01/01	TITLE DYS-5, JCD125V-600WC HALOGEN LAMP		
	CHKD	J.COOPER	06/01/01			
	ENGR					
	MFG					
	QUAL					
MATERIAL COMPOSITE	DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.	
FINISH	GOVT ACTVY		B	DYS-5	1000252	
			SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	