




BATTERY MANUFACTURER'S NAME OR BRAND NAME
AND PART NUMBER. 3/32" MINIMUM HIGH LETTERING.

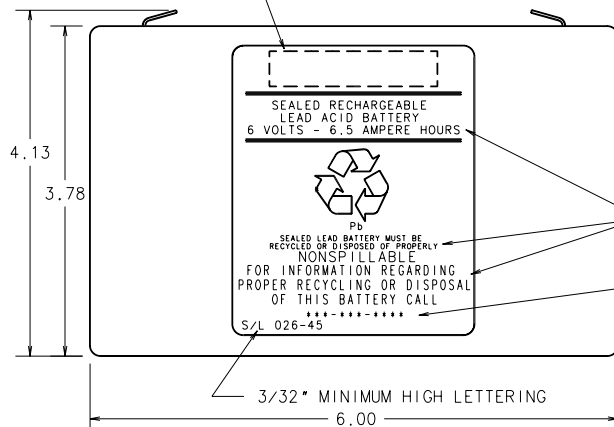

APPROVED SUPPLIERS

- (C) GS PE 6.5-6R
- EAGLE-PICHER CFM6V6.5 S-1
- (H) POWER SONIC PS-670FP
- (D) PANASONIC LCR6V6.5P (.250+-.188-)
- (E) TECHNACELL EP 665
- CSB STORAGE BATTERY OF AMERICA #GP670F2F1
- (M) PRISM GH670
- (N) B&B BP7-6

SPECIFICATIONS

NOMINAL VOLTAGE: 6.00 VOLTS
NOMINAL CAPACITY • 20 HR. RATE: 6.5 AH
TERMINALS: QUICK DISCONNECT
MATE WITH AMP FASTON SERIES
POSITIVE .032 X .250
NEGATIVE .032 X .188
POSITION MAY BE AS SHOWN OR OF
AT OPTION OF SUPPLIER

CASE MATERIAL: HIGH IMPACT POLYSTYRENE

(F) LABEL: MAY BE SINGLE OR MULTI-COLOR
SEPARATE LABEL OR PERMANENT
IMPRINT AT SUPPLIERS OPTION.
MANUFACTURERS DATE CODE MUST
BE ON BATTERY(1/8" HIGH LETTERING)

TEST: MUST PASS A 1-1/2 HOUR BATTERY DIS
TEST PER UL 924 WITH AN 18 WATT
INCANDESCENT LAMP LOAD

(G) ACCEPTANCE OF A COOPER PURCHASE ORDER FOR
BATTERY REQUIRES THAT THE VENDOR ACCEPT
BATTERIES FOR RECLAMATION. A PROPERLY SIGNED
LETTER TO THIS EFFECT IS TO BE PROVIDED
COOPER PRIOR TO THE BATTERIES BEING SHIPPED

(F) (I) 3/32" MINIMUM HIGH LETTERING

BATTERY MANUFACTURER'S PHONE NUMBER.
THE END USER CAN CONTACT FOR RECYCLING
OR DISPOSAL INSTRUCTIONS.
3/32" MINIMUM HIGH LETTERING.

N	ADDED B&B AS APPROVED	JJP	11/17/98	38822
M	ADDED NEW VENDOR	BJV	3/24/95	37686
L	ADDED NONSPILLABLE TO LABEL	R.V.	11/21/95	33185
K	CHG ALL LETTERING TO 3/32 MIN	DMW	7APR95	32100
J	ADDED CSB STORAGE BATTERY OF AMERICA TO APPROVED SUPPLIERS.	TGF	7-27-94	31063
NO.	REVISION	BY	DATE	ECN

I	REVISED LABELING REQUIREMENTS	SJM	1/7/94	30180
H	CHANGED POWER SONIC PS-660-FP TO PS-670FP	R.V.	11/3/93	29905
G	ADDED BATTERY RECLAMATION NOTE	SJM	9/27/93	29765
F	REVISED LABEL INFORMATION	SM	7/23/93	29497
E	ADDED TECHNACELL EP 665	JVA	9/10/91	26684
D	ADDED PANASONIC LCR6V6.5P	TM	12/28/88	22275
C	ADDED GS PE 6.5-6R	TM	8/9/88	21541
B	ADDED POWERSONIC TOP VIEW	JAB	3-23-88	20836
A	DRAWN ON CADAM	R.V.	10/22/87	20055
NO.	REVISION	BY	DATE	ECN



Cooper Lighting

MATERIAL:	DRAWN R.V.W.	DATE 10/22/87	PART NAME
	APPROVED	DATE	BATTERY
	ETR	DATE	
MATL THICKNESS RANGE (DECIMAL):	EDE N/A	ESA DATE N/A	PART NUMBER
	DEVELOPMENT PART NO.		026-45
FINISH:	INTERCOMPANY USAGE G	SCALE NONE	DWG SIZE B
STANDARD TOLERANCES: UNLESS OTHERWISE SPECIFIED	FRACTIONAL ±1/64	DECIMAL .00 ± .01 .000 ± .005	SHEET 1 OF 1

CONFIDENTIAL - The information contained in this document is the property of Cooper Industries, Inc. It is not for public disclosure. Possession of the information does not convey any right to loan, sell or disclose the information. Unauthorized reproduction or use of the information is prohibited. This document is to be returned to Cooper Industries, Inc. upon completion of the purpose for which it is loaned or upon request.
COPYRIGHT Cooper Industries Inc.
This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.