


## BENEFITS & FEATURES

- Completely self-contained
- Sealed maintenance-free lead calcium batteries
- Provides a minimum emergency duration of 90 minutes
- Standard with 7.2 watt tungsten lamps
- 120/277 volt selectable input
- Low voltage disconnect
- Brownout protection
- 100% solid state charger
- Solid state relay
- Fully adjustable non-slip, high impact 94V-0, thermoplastic heads
- Dual LED AC pilot and "READY" indicators
- Push-to-test switch
- Labor saving universal mounting
- 20 gauge metal housing with white baked enamel finish
- Remote capability on larger models
- Certified by ETL to UL924 standards

## SELF DIAGNOSTICS (SD OPTION)

Continually diagnoses unit performance and tests system (auto battery discharge every 30 days for 30 minutes and once every 12 months for 90 minutes) to meet electrical and life safety codes.

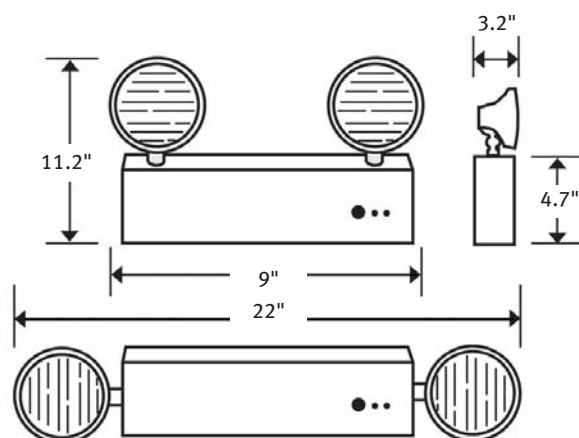

## CONTEMPORARY EMERGENCY LIGHT

Compact and contemporary, the EC Series Emergency Light unit is designed for ease of installation and economy. The rugged steel housing and white baked enamel finish gives this series both industrial strength and an attractive appearance. The EC family of emergency lights are ideally suited for commercial and institutional facilities where appearance and durability are primary concerns. Available with remote capability.



## LAMP SELECTION

TYPE	OPTIONS	WATTS
6V Tungsten	Standard:	7.2W, 9W
	Halogen (H):	8W, 10W, 12W
6V Sealed Beam	Standard (SB):	9W, 12W
	Halogen (SBH):	12W
12V Tungsten	Standard:	9W, 18W
	Halogen (H):	8W, 12W
12V Sealed Beam	Standard (SB):	12W, 18W
	Halogen (SBH):	8W

## ORDERING INFORMATION

MODEL	VOLTAGE	WATTS	HEAD TYPE	LAMP TYPE	OPTIONS
EC	6 (volt DC)	12 (6v)	2 = Double PAR 36	See Lamp Selector	SD = Self Diagnostics
	12 (volt DC)	18 (6v)	0 = No Heads		NC = NiCad Batteries
		27 (6v, 12V)			V = Voltmeter
		36 (6v, 12v)			S = Side Mounted Heads
		60 (6v, 12v)			BL = Black Housing
					WG = Wire Guard
					TP = Tamperproof
					3CP = Cordset (120V only)

Ordering Example: EC-6-18-2-6VH-9W-BL