
DWG NO. 1000291 SH 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

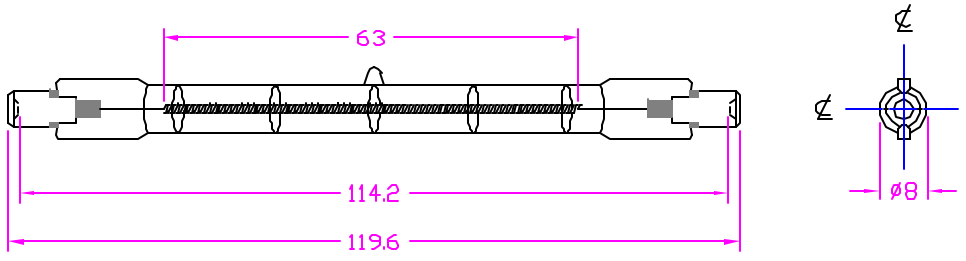

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	120 V
STARTING VOLTAGE	300 W
TOTAL LUMEN	5900 Lm
COLOR TEMP	3000 K
AVERAGE LIFE	2000 HRS
BASE TYPE	R7s-12
BULB FINISH	CLEAR
FILAMENT TYPE	C-8
BURNING POSITION	Hor ±4°

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DECIMALS .X ± –
.XX ±
.XXX ±
ANGLES ±
DRILLED HOLES PER AND 10387
REMOVE BURRS AND SHARP EDGES
ALL DIMENSIONS AFTER PLATING

MATERIAL
COMPOSITE

FINISH

CONTRACT NO.

APPROVALS	DATE
DRAWN R.AMPARO	05/07/01
CHKD J.COOPER	05/07/01
ENGR	
MFG	
QUAL	
DSGN ACTVY	
GOVT ACTVY	

USHIO AMERICA, INC.
5440 Cerritos Ave. Cypress, CA 90630

TITLE
EHM, J120V-300W
DOUBLE ENDED HALOGEN LAMP

SIZE	CODE IDENT NO.	DWG NO.
B	EHM	1000291

SCALE	WEIGHT	SHEET
NONE		1 OF 1

CAD