


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

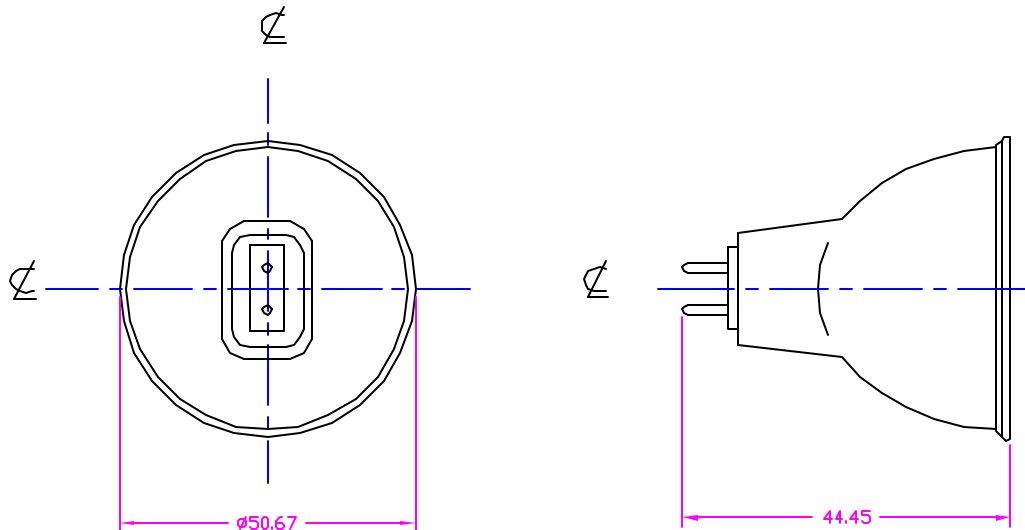

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
WD	44.5 MM
VOLTAGE	19 V
WATTAGE	80 W
COLOR TEMP	3400 K
AVERAGE LIFE	25 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Specular
FILAMENT TYPE	CC-B
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	08/24/99	TITLE EKG, JCR19V-80W HALOGEN LAMP	
		CHKD	D.GILCZYNSKI	08/24/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		SIZE		CODE IDENT NO.	DWG NO.	
FINISH		DSGN ACTVY		B	EKG	1000307
		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

NEXT ASSY USED ON APPLICATION