

4


3

DWG NO. 1000314 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

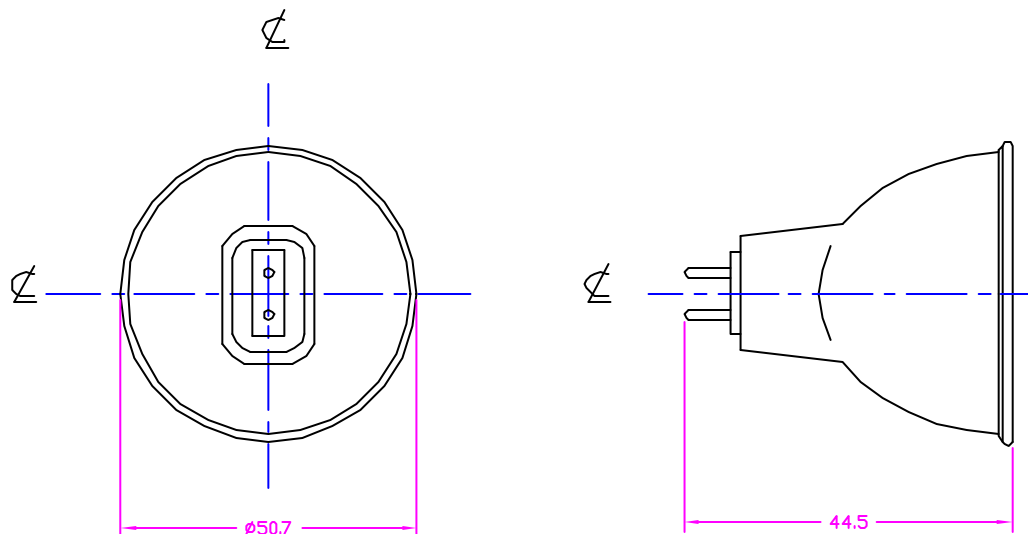

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	200 W
COLOR TEMP	3400 K
AVERAGE LIFE	25 HRS
BASE TYPE	GX5.3
REFLECTOR	DICHOIC
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING MATERIAL COMPOSITE FINISH		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630 TITLE EKK, JCR24V-200W HAALOGEN LAMP			
		APPROVALS				DATE	
		DRAWN	R.AMPARO			08/24/99	
		CHKD	D.GILCZYNSKI	08/24/99			
		ENGR					
		MFG					
		QUAL					
		DSGN ACTVY			SIZE	CODE IDENT NO.	DWG NO.
		GOVT ACTVY			B	EKK	1000314
				SCALE	NONE	WEIGHT	SHEET
					1 OF 1		

4

3

2

1

CAD