


# ELite-LED

**NOW  
DIMMABLE**




## Economically Priced Light Fixture with Integrated Driver

The ELite-LED is the perfect solution for new installation where lower upfront costs are required. It features an integrated electronic driver and connecting system for easy installation. The ELite-LED uses half the energy of T5 fluorescents with the same brightness and more than twice the lifetime. It is also now available in a dimmable version.



## Product-Features

- 120 Vac LED with integrated electronic driver
- Available in five different sizes: 1' (5 W), 2' (9 W), 3' (12 W), 4' (15 W), 5' (18 W)
- **NEW Feature:** Line Voltage **Dimmable** with compatible LED wall dimmer
- DLC 4.0 QPL listed
- Stocked in 3000 K and 4100 K
- Available from 2700 K to 6500 K by special order
- Finish: White housing with white frosted lens
- 50,000 hours useable life
- Good CRI > 80
- Efficacy  $\geq 104$  lm/W
- Fixtures can interconnect with direct connectors or accessory cables
- Optional hardwire adapter box available
- Magnetic mounting clips available
- 277 V option available by special order (non-dimmable)

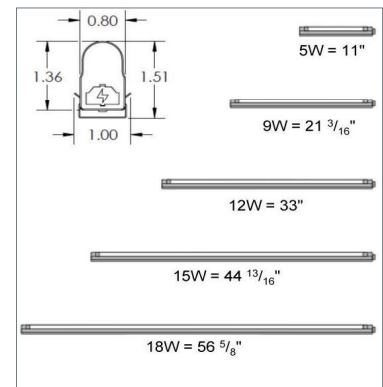

Fixture	Watts	Max Interconnected
EL/LED/12	5 W	100
EL/LED/22	9 W	55
EL/LED/34	12 W	41
EL/LED/46	15 W	33
EL/LED/59	18 W	27

Compatible Dimmers
Lutron: Diva - DVWCL-153PH Diva - DVELV-303P Skylark - CTCL-153PDH Radio Ra 2 - RRD-6NA Maestro - MRF2-6ND-120
Leviton: Decora - IPL06-10Z Decora - 6615-POW Decora - 6674-10W
Lightolier: Vega - V1000VAU
Cooper: SKYE AL - SAL06P
**Please contact Hera for a complete list of compatible dimmers.

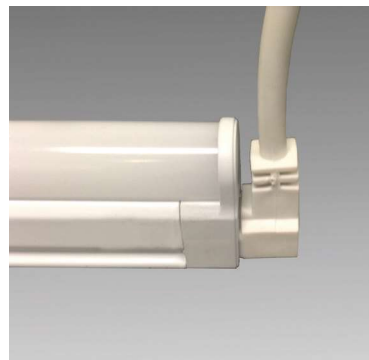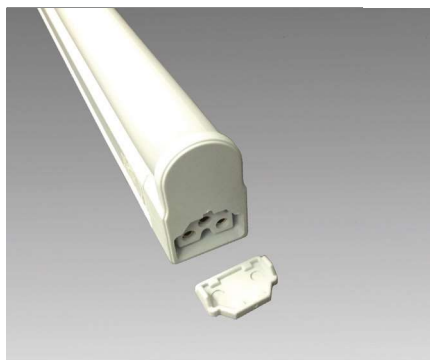

90 degree connector

## What you'll need to buy

### Light Fixtures

Length	Watt	Lumens	Code No. 3000 K
1'	5 W	525	EL/LED/12/WW
2'	9 W	945	EL/LED/22/WW
3'	12 W	1240	EL/LED/34/WW
4'	15 W	1575	EL/LED/46/WW
5'	18 W	1890	EL/LED/59/WW

Length	Watt	Lumens	Code No. 4100 K
1'	5 W	525	EL/LED/12/CW
2'	9 W	945	EL/LED/22/CW
3'	12 W	1240	EL/LED/34/CW
4'	15 W	1575	EL/LED/46/CW
5'	18 W	1890	EL/LED/59/CW

### Power Cords

	Length	Code No.
With Plug	36"	EL/LED/PC36
	48"	EL/LED/PC48
	72"	EL/LED/PC72
	96"	EL/LED/PC96
	132"	EL/LED/PC132
	144"	EL/LED/PC144

\* 90 degree power cord available by special order

### Accessories

	Code No.
Hardwire Box	EL/LED/HWB
Hardwire Box, switch	EL/LED/HWB/S

### Connecting Cables

	Length	Code No.
Straight Connector	6"	EL/LED/CC6
	12"	EL/LED/CC12
	24"	EL/LED/CC24
	36"	EL/LED/CC36
	48"	EL/LED/CC48
	72"	EL/LED/CC72
90 Degree Connector	6"	EL/LED/CC96
	12"	EL/LED/CC144
	6"	EL/LED/CC6/90
	12"	EL/LED/CC12/90
	24"	EL/LED/CC24/90
	36"	EL/LED/CC36/90
	48"	EL/LED/CC48/90
	72"	EL/LED/CC72/90
96"	EL/LED/CC96/90	
144"	EL/LED/CC144/90	