


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

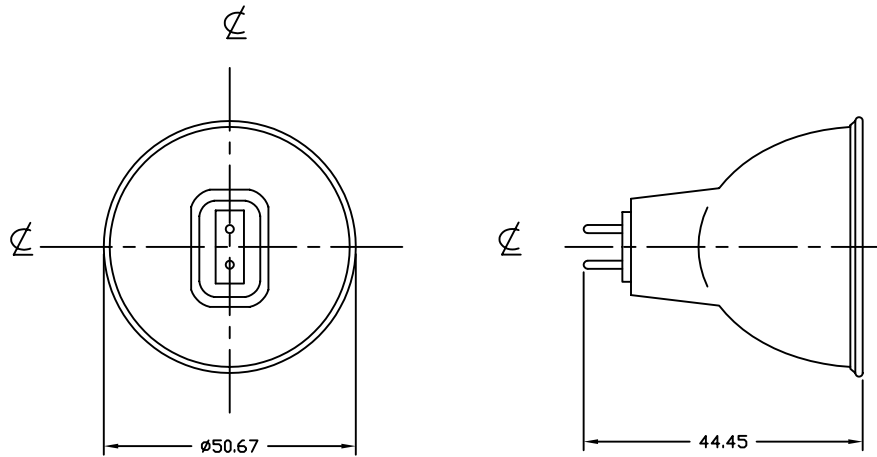

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	30 V
WATTAGE	80 W
COLOR TEMP	3400 K
AVERAGE LIFE	15 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Specular
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DRAWN	R.AMPARO	08/24/99
			CHKD	D.GILCZYNSKI	08/24/99
			ENGR		
MATERIAL COMPOSITE			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOV'T ACTVY		
			TITLE		
			USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
			ELB JCR30V-80W		
			SIZE	CODE IDENT NO.	DWG NO.
			B	ELB	1000317
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1