


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

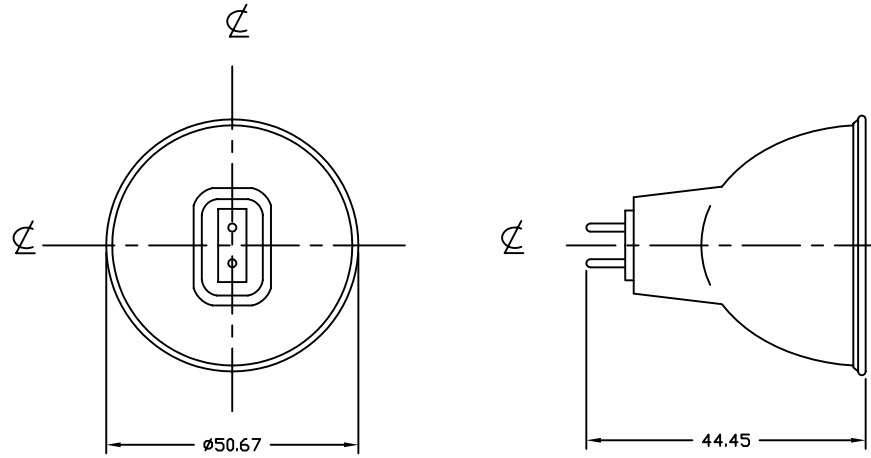

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED
BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED
IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE
FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	100 W
COLOR TEMP	3200 K
AVERAGE LIFE	200 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Faceted
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
	APPROVALS		DATE		TITLE EMC JCR12V-100W	
	DRAWN	R.AMPARO	08/24/99			
	CHKD	D.GILCZYNSKI	08/24/99			
	ENGR					
	MFG					
	MATERIAL	QUAL	SIZE		CODE IDENT NO.	DWG NO.
	COMPOSITE		B		EMC	1000326
	FINISH	DSGN ACTVY	SCALE		WEIGHT	
	GOVT ACTVY	NONE		SHEET 1 OF 1		