


4

3

DWG NO. 1000329 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

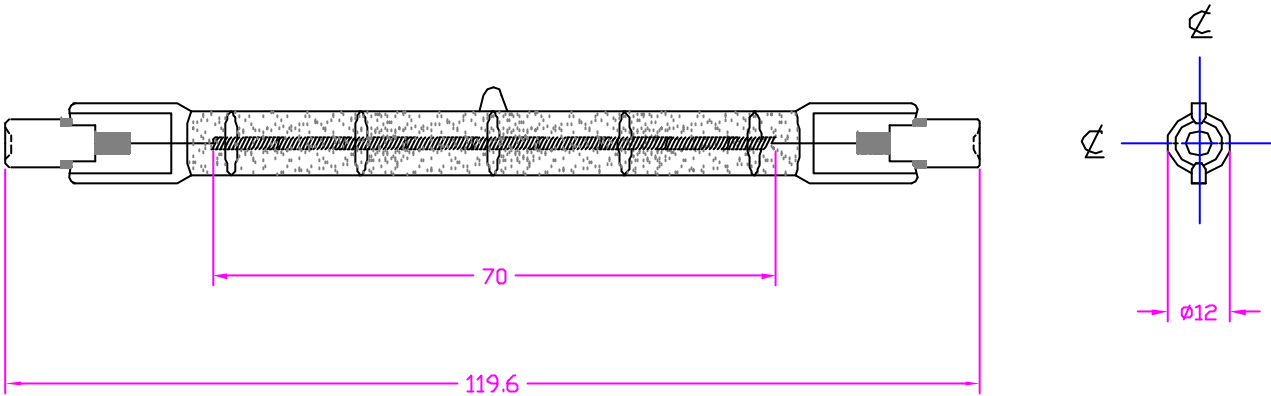

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	240 V
WATTAGE	800 W
LUMENS	21400 Lm
COLOR TEMP	3200 K
AVERAGE LIFE	250 HRS
FILAMENT TYPE	C-8
BASE TYPE	R7S-12
BULB FINISH	FROSTED
BURNING POSITION	Hor ±4°

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	02/23/01	TITLE EMF JP240V-800WCF DOUBLE ENDED HALOGEN LAMP	
		CHKD	K. CORDERO	02/23/01		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
FINISH		GOVT ACTVY		B	EMF	1000329
				SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD